How a job flows, and everything the people in it see

Every email, text, web page, portal screen and official form in a ceiling insulation job, in order: who it is for, when it happens, what is automatic and what a person does, and the records the VEU program requires.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd
Prepared 25 October 2026. Names and figures on the designs are examples.

THE WORKFLOW

Who does what, and what is gathered when · stages 1–4

● A person does it (lane colour) ◉ Automatic: the portal does it [Official form / record] Photo / video evidence Payment [Robot, being built]

	Stage 1 Enquiry and estimate	Stage 2 Ready Check	Stage 3 Quote and acceptance	Stage 4 Electrical safety check (PIESA)
Homeowner	● Calculator or email; answers 3 insulation questions (P1); saves their spot [Contact consent tick]	● Picks one of 3 times (O11); is home for the visit	● Opens the quote (O18/P2); accepts, signs the ESC consent, pays $349 by card [ESC Owner's Consent v1] $349 · Stripe	● Chooses 3–5 PIESA times (P3); gets the copy (O28) ● Fixes: approves, pays in full, picks a time (O29) Fixes paid in full
Installer	● Boss: Add a job (M3) for own customers	● Our leads: offers 3 times within 24 h (M5) ● Boss or staff: Ready Check in Mitti, presses Complete [Mitti A1/A2 Ready Check] Before 360° video per area · Ruler photo · Areas L×W · Hazard photo	● Boss: enters price, inclusions and electrician on the job page (A1, 278); staff never see it [Boss's price · portal]	● Waits ("Nothing for you", M2); told at clearance (I65)
Electrician				● Taps one of the owner's times (E3); PIESA in Mitti (E4/E5) [PIESA · official DEECA form] Switchboard photo · On-site photo + ID · Hazard photos ● Fixes: items at agreed rates + 3–5 times (E6); does them, uploads CoES, signs Section C (E8) [CoES if fixes]
Office	● Our leads: picks the installer, one tap in Needs me (decision 270)	● Nothing (missing items show as "Needs finishing" on the installer's page)	● Held quotes only: checks, presses Send · signs the AP part of the consent [Consent, AP part]	● Only if nobody can take it, or a non-standard fixes item
Automatic (portal)	◉ Estimate O1/O2 · Spot saved O10 (email + text) · reminders day 2/7/21, auto-close · address tidied (281) · Ready Check form created in Mitti within 15 min [Mitti A1/A2 created]	◉ Booking O12 · 6:30am text with the Mitti link · reads the form, lists missing basics · draws the floor plan [Area diagram]	◉ Builds and sends the quote when the Ready Check is complete AND the price is in (switch) · reminder O19 · You're in O22 · consent copy O63 · installer told I23/I24 [Quote auto-sent O18] Xero invoice	◉ Offer to the usual electrician, else nearest REC, 24 h each (269) · fixes quote O29 · copy to owner + installer ≥24 h before install · clearance I65 · 30-day clock [PIESA copy O28]

Home Insulation Victoria · decisions up to 284 (25 Oct 2026). Installer lane: "Boss" = the business owner, "Lead" = the CII-cleared lead installer on the day; otherwise boss or staff.

Codes (O18, M2, E4…) are the pages that follow.

THE WORKFLOW

Who does what, and what is gathered when · stages 5–7, plus always on (8–10)

● A person does it (lane colour) ◉ Automatic: the portal does it · Official form / record · Photo / video evidence · Payment · Robot, being built

	Stage 5 Booking the install, deposit	Stage 6 Install day	Stage 7 After the install	Stage 8–10 Always on, outside the job
Homeowner	● Picks an install day or suggests 1–5 (O33); pays 10% by bank transfer / PayID 10% deposit	● Is home; power off for the day; told if we couldn't get in (O65)	● Signs VEEC Section 4 on their page (P4); pays the balance; gets the completion pack VEEC Section 4 · Balance paid	
Installer	● Offers 3 days with arrival times inside the 30-day window, until agreed Install days agreed ● Before the day: safety plan on the job page, site note, every crew member signs SWMS signed	● Lead: 6:30am text → Mitti A3: crew photos + ID, lock-out photo, PIESA read, product photo, signs before work; after: videos, depth photos, power on, Complete Mitti A3 Install day · PIISA · portal-filled, lead signs · After 360° videos · Depth photos, ruler	● Lead: signs VEEC Part B on the job page (M2) VEEC Part B · installer	● 8: applies, signs the agreement, acknowledges the ESC notice (P5), keeps My business current Installer agreement · ESC collection notice ● 9: My work · Job page · Add a job · Today · Job offer · Money · My business
Electrician		● Only when the PIESA requires it: present at the start (photo Q29)		● 8: registers at Join our electrical network (E12): licence, REC, insurance, rates, bank REC agreement ● 9: My work · Job offer · Job page · Money · My business
Office	● One alert at 10 days left with nothing booked		● Final compliance check · creates the VEECs on the Registry until the robot does · AP Sign only as fallback VEEC lodged	● 8: reviews applications (CII, insurance, licences), approves ● 10: Needs me → Enquiries · Jobs · Partners · Money · More; only held quotes sent by hand
Automatic (portal)	◉ Booking O35/O35b · 48 h hold, release O64 · day changed O42 · 20/10-day reminders · writes the SWMS, texts the link · ESC notice ≥24 h before SWMS written · Registry robot	◉ 6:30am text repeats the safety plan link while unsigned · fills the PIISA from Ready Check + PIESA + this form · records the install complete when every check passes	◉ All done O44 · AP Part A automatic once 5 prerequisites are recorded (271) · reminders O61 · copy O62 · invoice O45 · pack O47 (warranty) · review O51 VEEC Part A · automatic · Warranties + pack · VEEC creation robot	◉ 8: received I53 · welcome I54/E13 · ESC notice I60/I62 · expiries checked · 9–10: trade steps arrive by text with a link · 15-minute tick (offers, reminders, pickup, follow-ups, payments) · one switch per message type

Home Insulation Victoria · decisions up to 284 (25 Oct 2026). Installer lane: "Boss" = the business owner, "Lead" = the CII-cleared lead installer on the day; otherwise boss or staff.

Codes (O18, M2, E4…) are the pages that follow.

Four people, one job

Homeowner · Installer · Electrician · Office

Homeowner

Never logs in. Every email carries a link to their own secure page. On their phone they answer three questions, accept the quote, sign the ESC consent, pay, pick times, approve any fixes and sign the rebate form.

Sees: Emails O1–O68 · pages P1–P4 · certificate C49

Installer

An EEC-certified installer business. Phone portal (six screens) plus the Mitti app (Ready Check and Install day forms). The business owner enters the price and sees money; staff do visits only. Everything that needs them arrives by text with a link.

Sees: Screens M1–M7 · emails I23–I65 · Mitti A1/A2/A3

Electrician

A licensed electrician (REC) who does the official PIESA and any electrical fixes. Takes the offer by tapping one of the owner's times, fills the PIESA in Mitti, lists fixes at agreed rates, uploads the Certificate of Electrical Safety and signs Section C. Same trade portal: My work, Job offer, Job page, Money, My business.

Sees: Screens E2–E11 · emails E1, E13 · page E12 · Mitti PIESA form

Office

Home Insulation Victoria. One queue, Needs me, for the rare job that stops. Picks the installer for our leads with one tap, checks held quotes, signs the AP part of the consent form and submits to the ESC Registry until the robot takes over. Never sends messages by hand.

Sees: Screens ON1–ON7 · application review O5r

THE TEN STAGES IN THIS DOCUMENT

1. Enquiry and estimate

HOMEOWNER · OFFICE · INSTALLER

A homeowner finds us online, calls, or emails; or an installer adds their own customer. They get an instant estimate and save their spot. Nothing is paid.

2. Ready Check

HOMEOWNER · INSTALLER · OFFICE

A certified installer measures the ceiling at the home, checks eligibility and takes the before evidence. For our own leads the office picks the installer; for installer-supplied customers it's their customer.

3. Quote and acceptance

HOMEOWNER · INSTALLER · OFFICE

When the Ready Check is complete and every check passes, the quote is built and sent automatically: the installer's price plus our $349 Accredited Provider fee plus the electrician's safety check, minus the VEU rebate. The office only sees quotes that are held.

4. Electrical safety check (PIESA)

HOMEOWNER · ELECTRICIAN · INSTALLER · OFFICE

A licensed electrician does the official Pre-Installation Electrical Safety Assessment within 30 days before the install. Fixes, if any, are quoted and done first.

5. Booking the install and paying the deposit

HOMEOWNER · INSTALLER · OFFICE

The installer offers three days with arrival times; the owner takes one or suggests others, until agreed. The install must happen within 30 days of the PIESA. No office step.

6. Install day

INSTALLER · HOMEOWNER

Before the day the crew sign the safety plan on the job page. On the day the lead installer works through the Install day form in Mitti: safety checks, declaration, then the after evidence. Completing the form records the install.

7. After the install: rebate form, invoice, completion

HOMEOWNER INSTALLER OFFICE

The owner signs the VEEC assignment form, the balance is paid, the office does the final compliance check and lodges the certificates.

8. Installer and electrician onboarding, business settings

INSTALLER ELECTRICIAN OFFICE

An installer business applies, is checked (CII certificates, insurance, licences), signs the agreement and is approved. From then on they manage their own business details.

9. The trade portal, every day

INSTALLER ELECTRICIAN

Six screens on the phone for installers; the electrician uses the same portal with My work, Job offer, Job page, Money and My business. Everything that needs a trade arrives by text with a link; otherwise they only do their visits.

10. The office, every day

OFFICE

One queue of what needs a person (Needs me), then Enquiries, Jobs, Partners, Money and More. Nothing is sent by hand except held quotes.

TWO KINDS OF JOB

Our leads: the homeowner found us; the office picks the installer; our price list; the PIESA goes to the installer's usual electrician, else the nearest approved REC. **Installer's own customers:** the installer adds them with Add a job; the business owner's price plus our $349 fee; we manage the VEU pathway. From the Ready Check on, both run the same way.

Automatic, or a person does it

Every message is sent by the portal from an event on the job; electrician offers are automatic and the office picks the installer for our leads with one tap. The only other human steps are the ones a person must do by law (sign a form, do the work on site) and the two Registry submissions, which a robot will do once the Registry login is in.

STEP	HOW	WHO	WHEN
Estimate email after the website calculator or an email enquiry	AUTOMATIC	Portal	Minutes after the enquiry
Spot saved confirmation (email + text); day 2, 7, 21 reminders; closing an unanswered estimate	AUTOMATIC	Portal	On the event; on the day
Ready Check form created in Mitti with the customer's details	AUTOMATIC	Portal	Within 15 minutes of Add a job or allocation
Choosing the installer for one of our leads (one tap in Needs me)	OFFICE DOES IT	OFFICE	When a spot is saved
Offering Ready Check times; picking one	INSTALLER DOES IT	INSTALLER	Within 24 hours of the offer; owner picks
6:30am text to the installer with the day's Mitti links	AUTOMATIC	Portal	Every morning there is a visit
Doing the Ready Check and pressing Complete	INSTALLER DOES IT	INSTALLER	At the home
Building the quote (installer price + $349 fee + electrician + rebate) and sending it	AUTOMATIC	Portal	The moment the Ready Check is complete and every check passes
Checking a held quote and pressing Send	OFFICE DOES IT	OFFICE	Only when a check fails
Accepting the quote, signing the ESC consent, paying $349	OWNER DOES IT	HOMEOWNER	From the quote email
Telling the installer the owner accepted or declined	AUTOMATIC	Portal	Instantly
Offering the PIESA to the installer's usual electrician, else the nearest approved REC	AUTOMATIC	Portal	After acceptance and the $349 payment
Taking the PIESA offer: tapping one of the owner's times (or Suggest another time / Not for me)	ELECTRICIAN DOES IT	ELECTRICIAN	Within 24 hours of the offer
PIESA at the home in Mitti: switchboard and on-site photos, hazards, declaration, owner signature	ELECTRICIAN DOES IT	ELECTRICIAN	Within 30 days before the install
Listing fixes items at the agreed rates with hours and 3–5 times; pressing Complete PIESA	ELECTRICIAN DOES IT	ELECTRICIAN	Same day as the PIESA (REC agreement)
Approving the fixes quote, paying in full, picking the electrician's time	OWNER DOES IT	HOMEOWNER	From the fixes email (O29)
Doing the fixes; uploading the Certificate of Electrical Safety; signing Section C	ELECTRICIAN DOES IT	ELECTRICIAN	At the booked fixes visit

STEP	HOW	WHO	WHEN
Fixes quote to the owner at the agreed rates	AUTOMATIC	Portal	When the PIESA records fixes (non-standard items held for the office)
PIESA copy to owner and installer; installer told the job is cleared	AUTOMATIC	Portal	On the PIESA result; at least 24 h before the install
ESC installation notification on the Registry	ROBOT (BEING BUILT)	Portal	At least 24 h before the install
Offering three install days; picking one; deposit	INSTALLER DOES IT	INSTALLER	Installer offers, owner picks and pays 10%
Booking emails, 48-hour deposit hold and release, 20 and 10 day reminders	AUTOMATIC	Portal	On the event; on the day
Xero invoice created and kept in sync with payments	AUTOMATIC	Portal	At acceptance; on every payment
Safety plan written for the job; crew sign it	AUTOMATIC	Portal	Written automatically; signing is one tap each
Install day form in Mitti; official PIISA filled and signed	INSTALLER DOES IT	INSTALLER	On the day (PIISA filled by the portal, signed by the lead)
Recording the install as complete; All done email and text	AUTOMATIC	Portal	When the Install day form is completed and every check passes
VEEC assignment form: installer and owner sign on their phones; the AP part is applied automatically once every prerequisite is recorded	AUTOMATIC	Portal	After the installer signs; owner is asked straight after
Rebate-form reminders days 1, 3, 7; copy of the signed form; completion pack; review request	AUTOMATIC	Portal	On the day
Final compliance gates (all automatic); VEEC creation on the ESC Registry	ROBOT (BEING BUILT)	Portal	After the owner signs
Outlook replies drafted for matched customer emails	AUTOMATIC	Portal	Drafts only; a person sends (switched on last)

SWITCHES

Every message type has its own switch in Office → Settings. Customer messages are off until the TEST run passes, then switched on one type at a time. Automatic electrician offers are on; installer offers for our leads are one tap in the office.

What the VEU program requires, and whether we have it

From the ESC Ceiling Insulation Activity Guide v1.2, Table 4 (record-keeping requirements) and the Activity Guide installation rules. "Have it" means the record is captured by the process in this document.

REQUIRED RECORD	WHAT IT MUST SHOW	WHEN	HAVE IT	HOW	WHERE IT COMES FROM
VEEC assignment form	ESC VEEC Assignment Form v1.1, all fields, installer and owner declarations signed	After the install, before VEECs are created	YES	BY HAND	Installer and owner sign on their phones (P4); the AP part is applied automatically once the five prerequisites are recorded; copy to owner within 10 business days (O62).
Tax invoice	Owner name, address, our ABN, product brand/model/R-value, m², price before and after the rebate, date	At completion	YES	AUTOMATIC	Xero invoice built by the portal with the required lines (O45).
Contract with the scheme participant	Agreement between the AP and the installer business	Before their first job	YES	BY HAND	Installer agreement signed at onboarding (M7).
Contract with the energy consumer	Executed, dated contract before the works	At acceptance	YES	OWNER DOES IT	Quote acceptance page (P2) with terms; copy in the job file.
Photo of the electrician at the premises (PIESA)	Geo-tagged, photo ID visible, before the assessment	PIESA visit	YES	ELECTRICIAN DOES IT	Electrician's Mitti PIESA form.
Photo of cable types at the switchboard	TPS or equivalent, taken by the electrician	PIESA visit	YES	ELECTRICIAN DOES IT	Electrician's Mitti PIESA form.
Certificate of Electrical Safety	Describes the rectification work	Only when fixes were done	YES	ELECTRICIAN DOES IT	Uploaded by the electrician on completing the fixes.
Photo of the electrician at the start of the install	Only when the PIESA requires an electrician at the start	Install day	YES	INSTALLER DOES IT	Install day form Q29 (asked only when the PIESA requires it).

REQUIRED RECORD	WHAT IT MUST SHOW	WHEN	HAVE IT	HOW	WHERE IT COMES FROM
PIESA form	DEECA form, all fields, signed by the electrician and the owner	Within 30 days before the install	YES	ELECTRICIAN DOES IT	Electrician's Mitti form; owner signs on their page; copies to owner and installer ≥24 h before (O28).
Life-support consent or medical plan	Only where a resident depends on life support	Before the install	YES	INSTALLER DOES IT	Install day form Q17–18 (asked only when life support = Yes; pre-filled from what the owner told us).
Owner consent to share information	ESC Owner's Consent Form, signed by the owner	At acceptance, ≥24 h before the install	YES	OWNER DOES IT	Signed on the quote page (P2); AP part by the office; copy emailed (O63).
PIISA form	DEECA form, all fields, signed by the lead installer	On the day, before work starts	YES	AUTOMATIC	Filled by the portal from the Ready Check, the PIESA and the Install day form; signed in Mitti (Q32–34).
Photo of each installer	Geo-tagged, photo ID visible, at the front of the premises	Install day, before work	YES	INSTALLER DOES IT	Install day form Q14.
360° video of each area before the upgrade	Lit, labelled, shows existing insulation, under 250 MB	Ready Check	YES	INSTALLER DOES IT	Ready Check, per area (added to the live form).
Existing insulation depth with a vertical ruler	Per area where insulation is present; brand/R-value markings	Ready Check	YES	INSTALLER DOES IT	Ready Check, per area (required when insulation is present, even if it will be removed).
Photo of the power isolated	Locked-out switchboard, solar and battery isolators off	Install day, before work	YES	INSTALLER DOES IT	Install day form Q22.
Product packaging photo	Brand, model, R-value label	Install day	YES	INSTALLER DOES IT	Install day form Q31.
360° video of each area after the upgrade	Coverage, depth, no waste, under 250 MB	Install day	YES	INSTALLER DOES IT	Install day form Q36.
New insulation depth with a vertical ruler	Per area	Install day	YES	INSTALLER DOES IT	Install day form Q37.
Diagram / floor plan of the insulated areas	Each area named, with dimensions, product, R-value, m^2	Ready Check and after the install	YES	AUTOMATIC	Drawn by the portal from the Ready Check (length × width) and the installed m^2.
Installer CII certificates	Lead and every installer EEC-certified	Before their first job	YES	OFFICE DOES IT	Verified at onboarding; crew on the day checked against the verified list.

REQUIRED RECORD	WHAT IT MUST SHOW	WHEN	HAVE IT	HOW	WHERE IT COMES FROM
ESC installation notification	Submitted on the ESC Registry ≥24 h before the install	Before the install	PARTLY	ROBOT (BEING BUILT)	The portal prepares every field and blocks the install without it; the robot submits once the Registry login is in (the office copies the block until then).
Warranty copy to the consumer; collection notice to installers	Product warranty ≥5 years; ESC collection notice	Before the AP signs the VEEC form	PARTLY	AUTOMATIC	Collection notice sent and recorded (I60–I62). Warranty PDFs still to be loaded for the completion pack.
SWMS	OHS Regulations 2017: HRCW, hazards, controls, how implemented; kept for the job	Before work starts	YES	AUTOMATIC	Written by the portal, signed by the crew on the job page, PDF filed.
Records kept	All of the above kept for the required period	Ongoing	YES	AUTOMATIC	Everything is filed in the job file; append-only history.

STILL TO CLOSE BEFORE THE FIRST CLAIM

- First real ESC installation notification on the Registry (the field list is a best guess until then).
- Product warranty PDFs loaded so the completion pack carries them.
- Our customised VEEC assignment form sent to the ESC for review (the template asks for it).

Ready Check (A1 installer customers · A2 our leads)

Jo's live form, read straight from Mitti, plus the four additions the rebate evidence needs (marked NEW). The two forms are identical; since decision 278 neither asks for a price: A2 (our leads) uses our price list and on A1 the business owner enters the price on the portal job page. The ceiling-area block repeats for each area the installer adds (up to 6).

* required Pre-filled the portal fills it in from the job; the installer can correct it ↳ logic: shown only when... Stop lines appear in red on the phone

Title Page

1 Portal Job Number Text **PRE-FILLED**
2 Site address * Text **PRE-FILLED**
3 Homeowner name * Text **PRE-FILLED**
4 Homeowner phone * Text **PRE-FILLED**
5 Homeowner email * Text **PRE-FILLED**
6 Homeowner agrees to be contacted by Home Insulation Victoria * Pick one (Yes / No)
7 Property type * Pick one (House / Townhouse / Unit or apartment / Other) **PRE-FILLED**
  8 What is the property type? * Text
    ↳ only shown when Other
9 Life support equipment at property? * Pick one (Yes / No) **PRE-FILLED**
10 Was the ceiling or roof built or replaced in the last 5 years? * Pick one (Yes / No)

Site Verification

11 What type of roof does the home have? * Pick one (Tiles / Metal sheet / Other)
  12 Describe the roof type * Text
    ↳ only shown when Other
13 How would you rate the ceiling access? * Pick one (Easy / Standard / Difficult / No safe access)
  14 Please explain why the access is difficult * Text
    ↳ only shown when Difficult
  15 Is there a difficult access charge? * Pick one (Yes / No)
    ↳ only shown when Difficult
    16 Difficult access fee ($ inc GST) * Text
      ↳ only shown when Yes
  17 Please explain why there is no safe access * Text
    ↳ only shown when No safe access
18 Upload a clear photo of the ceiling access point Photo

Ceiling Assessment

19 How many ceiling areas need to be measured separately? * Tick all
  Add a ceiling area (repeats per area) Button
    20 Which part of the home does this ceiling area cover? * Text
    21 How was this ceiling area measured? * Pick one (Laser measure / Tape measure / Floor plan / Other)
      22 Tell us how you measured it * Text
        ↳ only shown when Other
    23 Upload your area sketch or floor plan (optional) Photo
    24 Enter the measured ceiling area (m²) * Text
    NEW Length (m) * Number
    Help: Measure the longest length and width. Split an L-shaped ceiling into two areas. The portal works out the m² and draws the diagram.
    NEW Width (m) * Number
    25 Is there existing insulation in this ceiling area? * Pick one (Yes / No)
      26 What type of existing insulation is installed? Select all that apply * Tick all
        ↳ only shown when Yes

27 Please describe the existing insulation type * Text
↳ only shown when Other

28 What is the measured insulation depth (mm)? * Text
↳ only shown when Yes

29 What is the determined R value of the existing ceiling insulation? * Pick one (Below R2.0 / Above R2.0)
↳ only shown when Yes

30 Upload a photo clearly showing the measured insulation depth Photo
↳ only shown when Yes

NEW (the same photo becomes required, with a ruler standing in the insulation) *
Help: Needed for every area with existing insulation, even if it is being removed.

31 What is required for the existing insulation? * Pick one (Remove / Top up / Not sure)
↳ only shown when Yes

32 How much existing insulation needs to be removed? (m^2) * Text
↳ only shown when Remove

33 Upload an overview photo of this ceiling area Photo

NEW Slow 360° video of this ceiling area, lit, saying its name * Video
Help: This is the before video the rebate needs. Show any existing insulation.

34 Are there recessed downlights in this ceiling area? * Pick one (Yes / No)

35 How many recessed downlights? * Text
↳ only shown when Yes

36 Are there any issues that could affect the insulation installation? Example: exposed wiring, vermin, restricted access or other hazards * Pick one (Yes / No)

37 Please explain * Text
↳ only shown when Yes

NEW Describe the issue and add a photo * Photo
↳ only shown when issues = Yes

Your quote to the homeowner

38 What's included in your quote? * Tick all

39 What else is included? * Text
↳ only shown when Other

40 Total quoted price (inc GST) * Text

41 Who is doing the electrical safety check? * Tick all

42 Electrician name * Text
↳ only shown when A different electrician

43 Electrician licence number * Text
↳ only shown when A different electrician

44 Electrician price (inc GST) * Text
↳ only shown when A different electrician

Ready Check Outcome

45 Based on your onsite assessment, does this property meet the Ready Check requirements to proceed? * Pick one (Yes - Ready Check passed / No - Ready Check failed)

46 Why did the property fail the ready check? Select all that apply * Tick all
↳ only shown when No - Ready Check failed

47 What insulation product will you be using on this job? * Tick all
↳ only shown when Yes - Ready Check passed

48 I confirm the information, measurements, photos and quote provided in this Ready Check are accurate to the best of my knowledge. * Signature

Install day (A3 – Install day)

45 questions in plain language; about 24 for a solo installer with no solar. Nothing already answered in the Ready Check or the PIESA is asked again: the portal fills the official PIISA from those records and this form, and the safety plan is signed on the job page before the day.

* required Pre-filled the portal fills it in from the job; the installer can correct it ↳ logic: shown only when… Stop lines appear in red on the phone

Q1 Portal Job Number * Text **PRE-FILLED**

Q2 Site address * Text **PRE-FILLED**

Q3 Install date * Date **PRE-FILLED**

Q4 Accredited person * Text **PRE-FILLED**

Q5 Installer business * Text **PRE-FILLED**

Q6 Lead installer * Text **PRE-FILLED**

Q7 Lead installer's CII number * Text **PRE-FILLED**

Q8 Is anyone else installing today? * Yes / No

> **Q9** Second installer * Text
> ↳ only shown when Q8 = Yes

> **Q10** Second installer's CII number * Text
> ↳ only shown when Q8 = Yes

> **Q11** Is there a third installer? * Yes / No
> ↳ only shown when Q8 = Yes

> **Q12** Third installer * Text
> ↳ only shown when Q11 = Yes

> **Q13** Third installer's CII number * Text
> ↳ only shown when Q11 = Yes

Q14 Photo of each installer at the front door, showing photo ID * Photo
Help: One photo per person.

Q15 Does the household know the power will be off today? * Yes / No
Stop line when No: "Stop. Tell them before you go on."

Q16 Does anyone here rely on life support? * Yes / No **PRE-FILLED**

> **Q17** Do you have their written consent or medical plan? * Yes / No
> ↳ only shown when Q16 = Yes
> Stop line when No: "Stop. You need it before starting."

> **Q18** Upload the consent or medical plan * Photo
> ↳ only shown when Q17 = Yes
> *Help: Every page readable.*

Q19 Is the safety plan for this job signed? * Yes / No
Stop line when No: "Stop. Sign it on your job page first."
Help: It's on your job page.

Q20 Are all the common hazards covered in it? * Yes / No
Stop line when No: "Stop."

Q21 Is the power isolated, locked out and tagged, and the ceiling safe to enter? * Yes / No
Stop line when No: "Stop. Isolate, lock out and tag first."

Q22 Photo of the switchboard with the lock-out tag on * Photo
Help: Solar and battery isolators off too, if the home has them.

Q23 Is there solar, a battery or a generator? * Yes / No **PRE-FILLED**

> **Q24** Do you have the shutdown and restart instructions? * Yes / No
> ↳ only shown when Q23 = Yes
> Stop line when No: "Stop. An electrician must isolate it."

> **Q25** Does the ground-level isolator work and switch off safely? * Yes / No
> ↳ only shown when Q23 = Yes
> Stop line when No: "Stop. Get an electrician to check it."

Q26 Have you read the PIESA and is it safe to start? * Yes / No
Stop line when No: "Stop."

Q27 Does the PIESA need an electrician here at the start? * Yes / No **PRE-FILLED**

Q28 Is the electrician here? * Yes / No
↳ only shown when Q27 = Yes
Stop line when No: "Stop. Wait for the electrician."

Q29 Photo of the electrician at the front door, showing photo ID * Photo
↳ only shown when Q28 = Yes

Q30 Has anyone been in the ceiling since the PIESA? * Yes / No
Stop line when Yes: "Stop. An electrician must check again."
Help: Ask the owner.

Q31 Photo of the packaging showing brand, model and R-value * Photo
Help: One per product.

Q32 The official DEECA installer declaration and privacy statement (verbatim text, read before signing) Text

Q33 Everything on this form is true and complete * Checkbox

Q34 Lead installer's signature * Signature

Q35 That's the before-work part done. Come back to the next page when the insulation is in. (text) Text

Q36 After videos: one slow 360° of each ceiling area, lit, saying the area's name, showing full coverage and no rubbish left * Video, several files allowed

Q37 Depth photos: the new insulation in each area with a ruler standing in it * Photo, several files allowed
Help: Don't squash it.

Q38 Did the install take more than one day? * Yes / No

Q39 I checked every item on this form again before starting each day * Checkbox
↳ only shown when Q38 = Yes

Q40 Is the lock-out off and the power back on? * Yes / No
Stop line when No: "Don't leave until it is."

Q41 Who turned it back on? * Text
↳ only shown when Q40 = Yes
Help: Name, and whether it was the installer who locked it or the electrician.

Q42 Photo of the switchboard with the main switch on * Photo
↳ only shown when Q40 = Yes

Q43 Is the solar, battery or generator back on? * Pick one: Yes / No / There isn't one

Q44 I was here the whole time and supervised everyone * Checkbox

Q45 Lead installer's signature * Signature

PIESA – Electrician safety assessment

The electrician's Mitti form, built from the portal's own definition so every answer is read back and turned into the official DEECA PIESA Word form. 45 questions; the portal fills in the job, licence and REC details. Questions 42–45 are the AP evidence (decision 178): the PIESA is not complete until the ones that apply are on the form, geotagged where marked.

* required Pre-filled the portal fills it in from the job; the installer can correct it ↳ logic: shown only when... Stop lines appear in red on the phone

Job and life support

1 Job Reference ID * Text **PRE-FILLED**

2 Address including postcode * Text **PRE-FILLED**

3 Date of inspection * Date

4 Office life support record * Text **PRE-FILLED**

5 Is the life support record shown above still correct? * Yes / No

> 6 Have you received written consent or a medical plan? Please attach a photo of it. * Multiple choice (pick one)
> ↳ only shown when Life support confirmed Yes

> 7 Written consent or medical plan (kept as an attachment to this assessment) * Photo
> ↳ only shown when Life support confirmed Yes

Mains power

8 Is the mains power set-up safe? This means the mains cable in the ceiling is identified and marked, the main switch works and can be locked off, the... * Yes / No

> 9 Please tick each item that is not right. * Multiple choice (tick all)
> ↳ only shown when mainsSafe = No

Solar, battery or generator

10 Is there solar, a battery or a generator at the property? * Yes / No

> 11 Can it be safely shut down, and are its cables in the ceiling labelled, in conduit and protected? * Yes / No
> ↳ only shown when solarPresent = Yes

> 12 Please tick each item that is not right. * Multiple choice (tick all)
> ↳ only shown when solarSafe = No

Ceiling wiring

13 Are the cables, connections and fittings in the ceiling safe to work around and cover with insulation? * Yes / No

> 14 Please tick each problem you found. * Multiple choice (tick all)
> ↳ only shown when ceilingSafe = No

Downlights

15 Are there any downlights or other recessed lights in the ceiling? * Yes / No

> 16 How many are there? * Number
> ↳ only shown when downlightsPresent = Yes

> 17 Are any of them not IC or IC-4 rated? * Yes / No
> ↳ only shown when downlightsPresent = Yes

Appliances, fans and flues

18 Are there any appliances, exhaust fans or flues in the ceiling space? * Yes / No

> 19 Please describe each one, where it is, the hazard it creates, and what was done or needs to be done about it. * Text
> ↳ only shown when appliancesPresent = Yes

> 19a Does the action you described effectively reduce the risk from each hazard listed? * Yes / No
> ↳ only shown when appliancesPresent = Yes

Repair work

20 Is any electrical repair work needed before insulation can be installed? * Multiple choice (pick one)

21 Please tick the repair work that is required. * Multiple choice (tick all)
↳ only shown when rectificationOutcome = Yes, repair work is needed

22 Please describe the other repair work. * Text
↳ only shown when Other is ticked

Electrician declaration

23 Licence no: * Text **PRE-FILLED**

24 Full Name: * Text **PRE-FILLED**

25 Name: * Text **PRE-FILLED**

26 REC registration no: * Text **PRE-FILLED**

27 Telephone no: * Text **PRE-FILLED**

28 I declare that all information contained in and attached to this form is correct and not misleading by inclusion or omission * Tick

29 Electrician signature * Signature

Section C: after the repair work

30 Have you completed all of the repair work listed above, and is the ceiling now safe for insulation? * Yes / No
↳ only shown when rectificationOutcome = Yes, repair work is needed

31 Certificate of Electrical Safety number (required for any electrical works completed): * Text
↳ only shown when rectificationOutcome = Yes, repair work is needed

32 Date of Certification: * Date
↳ only shown when rectificationOutcome = Yes, repair work is needed

33 Licence no: * Text **PRE-FILLED**
↳ only shown when rectificationOutcome = Yes, repair work is needed

34 Full Name: * Text **PRE-FILLED**
↳ only shown when rectificationOutcome = Yes, repair work is needed

35 Name: * Text **PRE-FILLED**
↳ only shown when rectificationOutcome = Yes, repair work is needed

36 REC registration no: * Text **PRE-FILLED**
↳ only shown when rectificationOutcome = Yes, repair work is needed

37 Telephone no: * Text **PRE-FILLED**
↳ only shown when rectificationOutcome = Yes, repair work is needed

Owner declaration

38 Please confirm that the assessment was completed today, and that you understand that anyone going into the ceiling before installation may cancel th... * Yes / No

39 Name: * Text **PRE-FILLED**

40 Date: * Date

41 Owner signature * Signature

Evidence (AP record)

42 Photo of the cables at the switchboard (geotagged) * Photo (location on)
Help: Portal blocks completion until present and geotagged

43 Photo showing you on site at the property, holding your licence / photo ID (geotagged) * Photo (location on)
Help: Portal blocks completion until present and geotagged

44 Photo of each hazard listed (one per hazard; geotagged) * Photo (location on, several files)
↳ only shown when any hazard answered Yes (mainsSafe = No, solarSafe = No, ceilingSafe = No, downlightsNon...
Help: One photo per hazard listed, all geotagged

45 Certificate of Electrical Safety (photo or PDF) * Photo (PDF allowed)
↳ only shown when rectificationComplete = Yes (q30)
Help: Portal blocks completion until present; the CoES is kept 6 years

Enquiry and estimate

HOMEOWNER OFFICE INSTALLER

A homeowner finds us online, calls, or emails; or an installer adds their own customer. They get an instant estimate and save their spot. Nothing is paid.

WHAT HAPPENS

- Website calculator or email → estimate email with the rebate taken off the price (O1 or O2).
- Owner answers three questions about existing insulation (P1) and saves their spot → confirmation (O10).
- No reply: reminders on day 2 and day 7 (O66, O67), closing notice on day 21 (O68); the enquiry closes itself a week later.
- Not eligible or not in our area: told straight away (O6, O7).
- Installer's own customer: the installer taps Add a job (M3) and the Ready Check form is created for them in Mitti.
- Office: Enquiries screen (O4) shows only what needs fixing or is waiting on the owner; emails from unknown senders become enquiries.

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- Owner's contact consent (website tick) is recorded with the enquiry.

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
HOMEOWNER	**O1**	Email: Your estimate, save your spot	Minutes after the website calculator, when the home has no existing insulation.
HOMEOWNER	**O2**	Email: You may qualify, answer 3 questions	Minutes after the calculator, when the owner said there is some insulation.
HOMEOWNER	**O2b**	Email: You may qualify (insulation can stay)	Variant of O2 when the existing insulation can stay.
HOMEOWNER	**P1**	Page: Answer 3 questions, save your spot	Opened from O2; saves the spot.
HOMEOWNER	**O10**	Email: Spot saved	The moment the owner saves their spot (a text goes too).
HOMEOWNER	**O66**	Email: reminder, day 2	2 days after the estimate with no reply.
HOMEOWNER	**O67**	Email: reminder, day 7	7 days after the estimate with no reply.
HOMEOWNER	**O68**	Email: closing soon, day 21	21 days after the estimate; the enquiry closes a week later.
HOMEOWNER	**O6**	Email: not eligible	When the answers show the home doesn't qualify.
HOMEOWNER	**O7**	Email: not in our area yet	When the suburb is outside our area.
INSTALLER	**M3**	Screen: Add a job	Installer adds their own customer: name, address, mobile, email, consent tick.
INSTALLER	**M3**	Screen: Add a job, added	Straight after adding; the Ready Check form is created in Mitti within 15 minutes.
INSTALLER	**M3**	Screen: Add a job, errors	When a detail is missing or wrong.

FOR	CODE	WHAT IT IS	WHEN
OFFICE	**O4**	Screen: Enquiries	Office, any time: Fix details and Waiting on owner piles.

HOMEOWNER Stage 1: Enquiry and estimate

O1 · Email: Your estimate, save your spot

When: Minutes after the website calculator, when the home has no existing insulation.

Helen, you could save $1,610 on ceiling insulation

This is the Victorian Government's Energy Upgrades (VEU) rebate, taken straight off your price. To claim it, you need a certified installer, a licensed electrician and an accredited provider. We bring them all together and organise the whole job for you.

YOUR ESTIMATED VEU REBATE

You save $1,610

YOU PAY AFTER THE REBATE

$2,188

incl. GST · full price before rebate ~~$3,798~~

Based on what you told us: 137 m² ceiling, no existing insulation.

Try a different ceiling size

Save your spot, it's free

Certified installers are in high demand, so we book homes in the order people save their spot. When one is free near you, they'll offer you times for your free Ready Check. No payment, no obligation.

Save my free spot

What's included in $2,188

- **Free Ready Check**
  An installer visits to measure your ceiling and

confirm the price.

- **Licensed electrician safety check**
  Required before any insulation goes in. They check wiring, downlights and cables so your ceiling is safe.
- **Premium R5.0 ceiling batts**
  Approved for the VEU program and made to Australian Standard AS/NZS 4859.1.
- **Fitted by an EEC-certified installer**
  Certified Insulation Installer (CII) through the Energy Efficiency Council, installing to Australian Standard AS 3999.
- **We handle the rebate**
  As a VEU Accredited Person (A003654), we do all the government paperwork. The $1,610 comes straight off your price.

Not included, only if needed

- + **Removing old insulation**, if any needs to come out
- + **Ceiling access fee**, if your ceiling is hard to get into
- + **Electrical fixes**, if the safety check finds any
- + **A bigger ceiling** than you told us

We check these at your free Ready Check and tell you the exact price before you agree to anything. **See your full estimate**

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER Stage 1: Enquiry and estimate

O2 · Email: You may qualify, answer 3 questions

When: Minutes after the calculator, when the owner said there is some insulation.

Helen, you may qualify for $1,610 off ceiling insulation

You told us there's some insulation in your ceiling already. If it's thin or patchy (below R2.0), you can still get the Victorian Government's Energy Upgrades (VEU) rebate. We bring together the certified installer, licensed electrician and accredited provider you need, and organise the whole job.

YOUR POTENTIAL VEU REBATE

You save $1,610

YOUR COST IF ELIGIBLE

$2,188

incl. GST · full price before rebate ~~$3,798~~

Based on what you told us: 137 m² ceiling with some existing insulation.

Try a different ceiling size

Your existing insulation

Good news: **it may be able to stay.**

If it can stay — $0

New batts go straight over the top

If some needs removing — $15/m²

Only the areas that need it.

Up to $2,055 for your 137 m² ceiling.

Prices incl. GST. The installer checks this at your free Ready Check, and you'll know the exact cost before you

agree to anything.

Save your spot: answer 3 quick questions

Certified installers are in high demand, so we book homes in the order people save their spot. Tell us about your insulation and your spot is saved straight away. Just tap, no typing.

1. **What type is it?**
   Loose fill or batts
2. **About how thick is it?**
   Less than a finger, a hand's width, or thicker
3. **When was your home built?**
   Pick a decade

Answer & save my spot

Got photos or a video? You can add them too, only if it's safe. Please don't climb into the roof space.

What's included in $2,188

- **Free Ready Check**
  An installer visits to measure your ceiling and confirm the price.
- **Licensed electrician safety check**
  Required before any insulation goes in. They check wiring, downlights and cables so your ceiling is safe.
- **Premium R5.0 ceiling batts**
  Approved for the VEU program and made to Australian Standard AS/NZS 4859.1.
- **Fitted by an EEC-certified installer**
  Certified Insulation Installer (CII) through the Energy Efficiency Council, installing to Australian Standard AS 3999.
- **We handle the rebate**
  As a VEU Accredited Person (A003654), we do all the government paperwork. The $1,610 comes straight off your price.

Not included, only if needed

- + **Removing old insulation**, only if it can't stay ($15 per m², see above)

+ **Ceiling access fee**, if your ceiling is hard to get into
+ **Electrical fixes**, if the safety check finds any
+ **A bigger ceiling** than you told us

If your existing insulation is already R2.0 or above, the rebate isn't available and we'll let you know. We check all of this at your free Ready Check and tell you the exact price before you agree to anything. **See your full estimate**

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER Stage 1: Enquiry and estimate

O2b · Email: You may qualify (insulation can stay)

When: Variant of O2 when the existing insulation can stay.

Helen, you may qualify for $1,610 off ceiling insulation

You told us there's some insulation in your ceiling already. If it's thin or patchy (below R2.0), you can still get the Victorian Government's Energy Upgrades (VEU) rebate. We bring together the certified installer, licensed electrician and accredited provider you need, and organise the whole job.

YOUR POTENTIAL VEU REBATE

You save $1,610

YOUR COST IF ELIGIBLE

$2,188

incl. GST · full price before rebate ~~$3,798~~

Based on what you told us: 137 m² ceiling with some existing insulation.

Try a different ceiling size

Your existing insulation

Good news: **it may be able to stay.**

If it can stay — $0

New batts go straight over the top

If some needs removing — $15/m²

Only the areas that need it.

Up to $2,055 for your 137 m² ceiling.

Prices incl. GST. The installer checks this at your free Ready Check, and you'll know the exact cost before you agree to anything.

Save your spot, it's free

Certified installers are in high demand, so we book homes in the order people save their spot. When one is free near you, they'll offer you times for your free Ready Check, where they'll also check your existing insulation. No payment, no obligation.

Save my free spot

What's included in $2,188

- **Free Ready Check**
  An installer visits to measure your ceiling and confirm the price.
- **Licensed electrician safety check**
  Required before any insulation goes in. They check wiring, downlights and cables so your ceiling is safe.
- **Premium R5.0 ceiling batts**
  Approved for the VEU program and made to Australian Standard AS/NZS 4859.1.
- **Fitted by an EEC-certified installer**
  Certified Insulation Installer (CII) through the Energy Efficiency Council, installing to Australian Standard AS 3999.
- **We handle the rebate**
  As a VEU Accredited Person (A003654), we do all the government paperwork. The $1,610 comes straight off your price.

Not included, only if needed

- **Removing old insulation**, only if it can't stay ($15 per m², see above)
- **Ceiling access fee**, if your ceiling is hard to get into
- **Electrical fixes**, if the safety check finds any
- **A bigger ceiling** than you told us

If your existing insulation is already R2.0 or above, the rebate isn't available and we'll let you know. We check all of this at your free Ready Check and tell you the exact price before you agree to anything. **See your full estimate**

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

Home Insulation Victoria

ALMOST THERE, HELEN

Answer 3 quick questions to save your spot

Just tap. It takes under a minute. Your $1,610 rebate is waiting.

QUESTION 1 OF 3

What type is your insulation?

- ○ Loose fill (fluffy or crumbly)
- ◉ **Batts (blanket strips)**
- ○ Not sure

QUESTION 2 OF 3

About how thick is it?

- ○ Less than a finger's length
- ◉ **About a hand's width**
- ○ Thicker
- ○ Can't tell

QUESTION 3 OF 3

When was your home built?

- ○ 1990 or earlier
- ○ 1991–1999
- ○ 2000–2009
- ○ 2010–2020
- ○ In the last 5 years
- ○ Not sure

Got photos or a video? (optional)

It helps the installer prepare. Only if it's safe: hold your phone up through the ceiling hatch. Please don't climb into the roof space.

Add photos | Add a video

Save my free spot

Answer question 3 to save your spot

No payment · no obligation

No longer interested

HOMEOWNER Stage 1: Enquiry and estimate

O10 · Email: Spot saved

When: The moment the owner saves their spot (a text goes too).

Smart move, Helen. Your spot is saved.

Your $1,610 rebate is waiting.

Demand is high and installer capacity is limited, so we book homes in the order spots were saved. You've locked in your place, so there's nothing more you need to do right now.

VEU REBATE	YOU PAY ABOUT
$1,610	$2,188

Estimate incl. GST for 137 m². Confirmed at your free Ready Check.

What happens next

1. **An installer offers you times**
   When a certified installer is free near Glen Waverley, we'll text and email you their times for your free Ready Check.
2. **Tap the time that suits you**
   Or suggest other days. No phone tag.
3. **Free Ready Check, then your exact price**
   They measure your ceiling and check your insulation. You get your final quote. No payment, no obligation.

See my job

What's included in $2,188

- **Free Ready Check**
  An installer visits to measure your ceiling and confirm the price.

- **Licensed electrician safety check**
  Required before any insulation goes in. They check wiring, downlights and cables so your ceiling is safe.
- **Premium R5.0 ceiling batts**
  Approved for the VEU program and made to Australian Standard AS/NZS 4859.1.
- **Fitted by an EEC-certified installer**
  Certified Insulation Installer (CII) through the Energy Efficiency Council, installing to Australian Standard AS 3999.
- **We handle the rebate**
  As a VEU Accredited Person (A003654), we do all the government paperwork. The $1,610 comes straight off your price.

Not included, only if needed

- + **Removing old insulation**, if any needs to come out
- + **Ceiling access fee**, if your ceiling is hard to get into
- + **Electrical fixes**, if the safety check finds any
- + **A bigger ceiling** than you told us

We check these at your free Ready Check and tell you the exact price before you agree to anything.

Have a friend who needs a spot saved?

Send them our free eligibility checker. It takes a minute.

Send to a friend →

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER Stage 1: Enquiry and estimate

O66 · Email: reminder, day 2

When: 2 days after the estimate with no reply.

Helen, your $1,610 rebate spot is still open

A couple of days ago we sent your ceiling insulation estimate. Nothing has changed: the $1,610 Victorian Energy Upgrades rebate is still available and your spot is still open.

YOUR ESTIMATED VEU REBATE

You save $1,610

YOU PAY AFTER THE REBATE

$2,188

incl. GST · full price before rebate ~~$3,798~~

Based on what you told us: 137 m² ceiling, no existing insulation.

Try a different ceiling size

Save your spot, it's free

Certified installers are in high demand, so we book homes in the order people save their spot. It takes a few seconds. No payment, no obligation.

Save my free spot

Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979

HOMEOWNER Stage 1: Enquiry and estimate

O67 · Email: reminder, day 7

When: 7 days after the estimate with no reply.

Helen, still thinking about your ceiling insulation?

It's been a week since we sent your estimate, so here it is again. The $1,610 rebate comes straight off the price, and nothing is locked in until after your free Ready Check.

YOUR ESTIMATED VEU REBATE

You save $1,610

YOU PAY AFTER THE REBATE

$2,188

incl. GST · full price before rebate ~~$3,798~~

Based on what you told us: 137 m² ceiling, no existing insulation.

Try a different ceiling size

Save your spot, it's free

Save your spot and a certified installer will offer you times for your free Ready Check when one is free near you. No payment, no obligation.

Save my free spot

Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979

HOMEOWNER Stage 1: Enquiry and estimate

O68 · Email: closing soon, day 21

When: 21 days after the estimate; the enquiry closes a week later.

Helen, we'll close your estimate soon

We sent your ceiling insulation estimate three weeks ago and haven't heard back, so we'll close it in a week to keep our list accurate.

YOUR ESTIMATED VEU REBATE

You save $1,610

YOU PAY AFTER THE REBATE

$2,188

incl. GST · full price before rebate ~~$3,798~~

Based on what you told us: 137 m² ceiling, no existing insulation.

Try a different ceiling size

Want to keep your spot? Save it now

Save your spot and you stay on the list with your $1,610 rebate. No payment, no obligation.

Save my free spot

If now isn't the right time, that's fine. You can come back any time: reply to this email or get a fresh estimate from our calculator and we'll pick up where we left off.

Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979

HOMEOWNER Stage 1: Enquiry and estimate

O6 · Email: not eligible

When: When the answers show the home doesn't qualify.

Helen, your ceiling insulation result

Thanks for checking with us. Based on what you told us, your home doesn't qualify for the VEU ceiling insulation rebate at the moment. We'd rather tell you now than waste your time.

Why

From the photos and details you sent us, the insulation already in your ceiling appears to be R2.0 or above. The rebate is only available where existing insulation is below R2.0.

Something doesn't look right?

If any of your details were wrong, for example your ceiling size or the insulation you have, check your result and let us know. We'll take another look.

Review my result

Know someone thinking about insulation?

They can check their own eligibility in about a minute.

Send to a friend →

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER Stage 1: Enquiry and estimate

O7 · Email: not in our area yet

When: When the suburb is outside our area.

Helen, we're not in Mildura just yet

Thanks for your enquiry. Your home looks like it could qualify for the VEU ceiling insulation rebate, but we don't have a certified installer and licensed electrician covering Mildura 3500 yet. We only send people we've checked, so we won't rush it.

What happens now

- **We keep your details on file.** You don't need to do anything.
- **We're adding installers across Victoria.** As soon as one covers your area, we'll email you.
- **No payment, no obligation.**

Know someone thinking about insulation?

They can check their own eligibility in about a minute.

Send to a friend →

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

INSTALLER Stage 1: Enquiry and estimate

M3 · Screen: Add a job

When: Installer adds their own customer: name, address, mobile, email, consent tick.

Home Insulation Victoria

DS

Add a job

Just the owner's details.

Everything else goes in the Ready Check form in Mitti. Enter the details perfectly and in full — they carry onto the quote and all the paperwork.

Owner

Owner's full name

Helen Yang

Address

18 Bogong Avenue, Glen Waverley

✓ **Address found** 18 Bogong Avenue, Glen Waverley VIC 3150

Start typing, then pick the address from the list.

Mobile

0412 345 678

Email

helen.yang@example.com

☑ The owner has given Home Insulation Victoria permission to contact them.

Ready Check visit (optional)

Only if you've already agreed a time with the owner.

Mon 26 Oct ▾ 7:30am ▾

Skip it or fill it. A time puts the visit in your 6:30am text. No time = no reminder.

Add job

The Ready Check form appears in your Mitti app within about 15 minutes. Press Complete in Mitti only when it's fully finished — that sends the owner their quote.

INSTALLER Stage 1: Enquiry and estimate

M3 · Screen: Add a job, added

When: Straight after adding; the Ready Check form is created in Mitti within 15 minutes.

Home Insulation Victoria

DS

Job added

HV-3166 · 18 Bogong Avenue, Glen Waverley

Helen Yang · 0412 345 678

Your Ready Check form is ready in Mitti

Ready Check **Mon 26 Oct at 7:30am** — it's in your 6:30am text. Fill in as much as you can at the visit. Press Complete only when it's fully finished — that sends Helen her quote.

Open Mitti form

WHAT WE DO NOW

1. Nothing is sent to Helen until you press Complete.
2. We prepare the quote from your form: your price plus our $349 fee.
3. We arrange the electrical safety check once Helen accepts.

Go to the job

Add another job

My work | Add a job | Money | My business

INSTALLER Stage 1: Enquiry and estimate

M3 · Screen: Add a job, errors

When: When a detail is missing or wrong.

Home Insulation Victoria

DS

Add a job

Just the owner's details.

Everything else goes in the Ready Check form in Mitti. Enter the details perfectly and in full — they carry onto the quote and all the paperwork.

3 things to fix before the job can be added.

Owner

Owner's full name

Helen

Enter the owner's first and last name.

Address

18 Bogong Av

Pick the address from the list.

Start typing, then pick the address from the list.

Mobile

0412 345 678

Email

helen.yang@example

That doesn't look like an email address.

☐ The owner has given Home Insulation Victoria permission to contact them.

Tick this once the owner has agreed.

Ready Check visit (optional)

Only if you've already agreed a time with the owner.

Day ▼ Time ▼

Skip it or fill it. A time puts the visit in your 6:30am text. No time = no reminder.

Add job

Your typed details stay on your phone if the signal drops.

Home Insulation Victoria **OFFICE** Stage 1: Enquiry and estimate

O4 · Screen: Enquiries

When: Office, any time: Fix details and Waiting on owner piles.

Home Insulation Victoria | Needs me | **Enquiries** | Jobs | Partners | Money | More ▾ | Find a job, owner or address | CM

Enquiries

38 open · every enquiry in one pile · saving a spot makes it a job · estimate-only leads are reminded automatically and close themselves.

New enquiry (phone)

Fix details 9 | **Waiting on owner 29**

INSULATION: No | Some | Not sure

SIZE: Under 100 m² | 100–150 m² | Over 150 m² | No size

SUBURB / AREA: ✓ Eastern suburbs | South-east | North | West | Any suburb...

SOURCE: Website | Phone | Installer

LAST HEARD: Today | This week | Older | Never

Pick as many as you like · every column is sortable · 1 = hottest: no insulation, size known, recent contact, in a covered area.

Waiting on owner · 29 · showing 6 | Sort: priority ▾ | Actions ▾

Spot offered or the three questions asked · reminders are automatic · nothing for us to do until they answer

#	JOB	OWNER	STREET	SUBURB	POST	WAITING ON	LAST HEARD	
1	HV-3182	Nadia Petrova	3 Lakeview Drive	Lilydale	3140	Spot offered 24 Oct · opened	Today 7:30am · email	Open
2	HV-3170	Aisha Karim	22 Dorset Road	Croydon	3136	Spot offered 21 Oct · reminder 1 sent	21 Oct · email	Open
3	HV-3174	Sam Whitlock	16 Mahoneys R...	Forest Hill	3131	Spot offered 23 Oct · not opened	Yesterday · text	Open

4	HV-3121	Ruth Mackenzie	41 Burwood Hig…	Burwood East	3151	Asked the 3 questions 20 Oct · no answer	20 Oct · email	Open
5	HV-3117	Victor Alonso	5 Dandenong R…	Clayton	3168	Asked the 3 questions 20 Oct · answered size only	22 Oct · email	Open
6	HV-3168	Ben Caruso	9 Pine Street	Mitcham	3132	Spot offered 18 Oct · reminder 2 sent	20 Oct · text	Open

Ready Check

HOMEOWNER INSTALLER OFFICE

A certified installer measures the ceiling at the home, checks eligibility and takes the before evidence. For our own leads the office picks the installer; for installer-supplied customers it's their customer.

WHAT HAPPENS

- Our leads: the office picks the installer; the installer gets the offer (M5) and has 24 hours to offer three visit times.
- Owner picks a time (O11) and gets the booking (O12).
- Installer's Today screen (M4) and the 6:30am text carry the Mitti link for the day.
- The installer fills the Ready Check in Mitti (Ready Check form, page listed under Official forms) and presses Complete.
- Anything missing shows on the installer's job page as 'Needs finishing'.

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- Ready Check (Mitti): measurements, existing insulation with ruler photo, before video of each area, downlights, hazards with photo, product and price.

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
INSTALLER	**M5**	Screen: Job offer	Our leads: when the office picks this installer; open 24 hours.
INSTALLER	**M5**	Screen: Job offer, accepted	After the installer offers three Ready Check times.
INSTALLER	**M5**	Screen: Job offer, not for me	Installer declines; the office picks again.
HOMEOWNER	**O11**	Email: pick a time for your free Ready Check	When the installer offers three times.
HOMEOWNER	**O12**	Email: You're booked	When the owner picks a time.
INSTALLER	**M4**	Screen: Today, Ready Check day	The morning of the Ready Check, with the Mitti link.
INSTALLER	**M2**	Screen: Job page, own customer before the Ready Check	Installer's own customer, before the visit.
INSTALLER	**M2**	Screen: Job page, needs finishing	Mitti form completed with something missing.
INSTALLER	**M2**	Screen: Job page, change allocation	Installer hands a job back or changes who does it.

Home Insulation Victoria **INSTALLER** Stage 2: Ready Check

M5 · Screen: Job offer

When: Our leads: when the office picks this installer; open 24 hours.

Home Insulation Victoria

DS

‹ My work

New job offer Closes in 23h 10m

Ready Check in Glen Waverley

About 6 km away · Home Insulation Victoria lead

Owner says ~120 m²

Owner says some insulation

The Ready Check visit is free, as in your agreement. You're paid for the install at your agreed rates × the measured area, within 7 days of our approval. The owner's price is set by Home Insulation Victoria.

TO TAKE THIS JOB

Offer the owner 3 Ready Check times

Three different days in the next 3 weeks, 7am–5pm. The owner picks one or suggests other days.

✓ Mon 26 Oct	Tue 27 Oct	✓ Wed 28 Oct
Thu 29 Oct	✓ Fri 30 Oct	More days

Arrival time for each day

Mon 26 Oct	4:00pm ▾
Wed 28 Oct	7:30am ▾
Fri 30 Oct	12:30pm ▾

Accept this job

Sends these 3 times to the owner. The address and the owner's details show once you accept.

WHAT HAPPENS NEXT

1

The owner picks one of your times. You get a text with the day, time and address.

2. Do the Ready Check and fill in the Mitti form. Don't discuss pricing with the owner.

3. Press Complete — we send the owner their quote. Once the safety check is cleared, you offer 3 install days.

This offer is only for you and stays open 24 hours. If it's not for you, it goes back to the office.

Not for me

Home Insulation Victoria **INSTALLER** Stage 2: Ready Check

M5 · Screen: Job offer, accepted

When: After the installer offers three Ready Check times.

Home Insulation Victoria DS

‹ My work

You've taken this job

Ready Check in Glen Waverley

HV-3117 · Home Insulation Victoria lead

NEXT

Nothing for you — the owner is picking a time

We've sent Helen your 3 times. You get a text with the day, time and address as soon as she picks one. If none suit, she suggests other days and it comes back to you.

Mon 26 Oct	4:00pm
Wed 28 Oct	7:30am
Fri 30 Oct	12:30pm

Change these times

OWNER

Name	Helen Yang
Address	Shown once a time is booked

WHAT HAPPENS NEXT

Ready Check	Free visit · fill in the Mitti form
Your pay	Agreed rates × measured area, after the install

Back to My work ›

My work Add a job Money My business

INSTALLER Stage 2: Ready Check

M5 · Screen: Job offer, not for me

When: Installer declines; the office picks again.

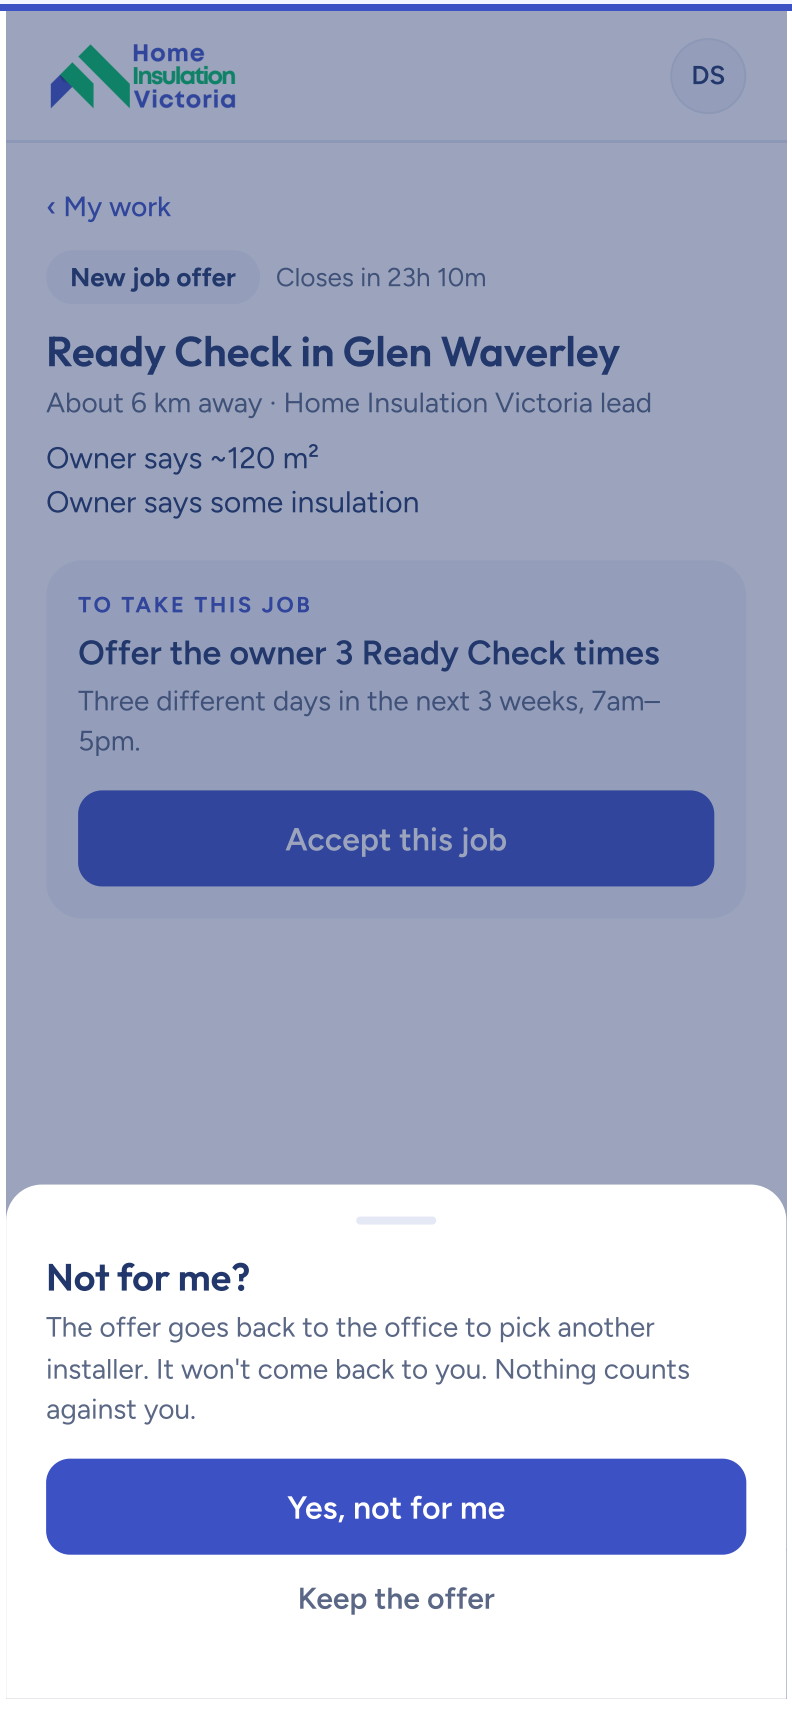

HOMEOWNER Stage 2: Ready Check

O11 · Email: pick a time for your free Ready Check

When: When the installer offers three times.

Helen, pick a time for your free Ready Check

Good news: a certified installer near Glen Waverley is ready for you. Tap the time that suits you and it's booked.

Tuesday 28 October	**8:00am ›**
Wednesday 29 October	**12:30pm ›**
Friday 31 October	**7:30am ›**

None suit? **Suggest other days**

At your Ready Check

The installer measures your ceiling, checks your existing insulation and access, and confirms your exact price. It's free, with no payment and no obligation.

VEU REBATE	YOU PAY ABOUT
$1,610	**$2,188**

Estimate incl. GST for 137 m². Confirmed at your free Ready Check.

What's included in $2,188

- **Free Ready Check**
  An installer visits to measure your ceiling and confirm the price.

- **Licensed electrician safety check**
  Required before any insulation goes in. They check wiring, downlights and cables so your ceiling is safe.
- **Premium R5.0 ceiling batts**
  Approved for the VEU program and made to Australian Standard AS/NZS 4859.1.
- **Fitted by an EEC-certified installer**
  Certified Insulation Installer (CII) through the Energy Efficiency Council, installing to Australian Standard AS 3999.
- **We handle the rebate**
  As a VEU Accredited Person (A003654), we do all the government paperwork. The $1,610 comes straight off your price.

Not included, only if needed

- + **Removing old insulation**, if any needs to come out
- + **Ceiling access fee**, if your ceiling is hard to get into
- + **Electrical fixes**, if the safety check finds any
- + **A bigger ceiling** than you told us

We check these at your free Ready Check and tell you the exact price before you agree to anything.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER Stage 2: Ready Check

O12 · Email: You're booked

When: When the owner picks a time.

You're booked, Helen

Your free Ready Check is confirmed.

YOUR READY CHECK

Tuesday 28 October
8:00am

824 High Street Road, Glen Waverley
Installer: Deep Insulation · 0400 000 000

Before they arrive

- Make sure the installer can reach your **ceiling hatch** (clear anything underneath it).
- If you have **pets**, keep them away from the work area.
- Have a think about any **questions** you'd like to ask.

Need a different time? Tap **Change time** on your job page and the installer will offer new times. Or call or text Deep Insulation on 0400 000 000.

See my job

VEU REBATE	YOU PAY ABOUT
$1,610	$2,188

Estimate incl. GST for 137 m². Confirmed at your free Ready Check.

What's included in $2,188

Free Ready Check
An installer visits to measure your ceiling and

confirm the price.

- **Licensed electrician safety check**
  Required before any insulation goes in. They check wiring, downlights and cables so your ceiling is safe.
- **Premium R5.0 ceiling batts**
  Approved for the VEU program and made to Australian Standard AS/NZS 4859.1.
- **Fitted by an EEC-certified installer**
  Certified Insulation Installer (CII) through the Energy Efficiency Council, installing to Australian Standard AS 3999.
- **We handle the rebate**
  As a VEU Accredited Person (A003654), we do all the government paperwork. The $1,610 comes straight off your price.

Not included, only if needed

- + **Removing old insulation**, if any needs to come out
- + **Ceiling access fee**, if your ceiling is hard to get into
- + **Electrical fixes**, if the safety check finds any
- + **A bigger ceiling** than you told us

We check these at your free Ready Check and tell you the exact price before you agree to anything.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

Home Insulation Victoria INSTALLER Stage 2: Ready Check

M4 · Screen: Today, Ready Check day

When: The morning of the Ready Check, with the Mitti link.

Home Insulation Victoria DS

‹ My work

Today · Mon 26 Oct · 7:30am

Ready Check · Yang

18 Bogong Avenue, Glen Waverley

Helen Yang · HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Do the Ready Check in Mitti

Measure every ceiling area (length × width), photos, existing insulation, access and hazards. We price Helen's quote from your agreed rates.

- [x] Location on (photos are geotagged)
- [x] Phone charged
- [ ] I will not discuss pricing with the owner

Open Mitti form

WHAT WE KNOW

Owner says	~120 m² · some insulation
Ready Check	Free visit, as in your agreement
Your pay	Agreed rates × measured area, after the install

WHO'S ON THIS

Allocated to	Deep Singh

Couldn't get in? ›

My work | Add a job | Money | My business

Home Insulation Victoria **INSTALLER** Stage 2: Ready Check

M2 · Screen: Job page, own customer before the Ready Check

When: Installer's own customer, before the visit.

Home Insulation Victoria DS

‹ My work

7 Lum Road, Wheelers Hill

Mei Chen

HV-3151 · Your customer

Call | Text | Directions

NEXT

Do the Ready Check and fill in the Mitti form

You arrange the visit with Mei directly. Measurements, photos, product and your price all go in the form.

Ready Check day and time (optional)

Mon 26 Oct ▾ 7:30am ▾

A time puts the visit in your 6:30am text. No time = no reminder.

Save the day and time

READY CHECK

Mitti form — Ready · nothing filled in yet

Open Mitti form ›

QUOTE

Status — Prepared once you press Complete in Mitti

Your price goes in the Mitti form. We add our $349 fee and send the owner their quote.

WHO'S DOING THIS

Ready Check — Deep Singh Change

Install day Not yet

Choose who does the install once a day is booked.

MESSAGES

You · Fri 24 Oct

Hi Mei, I'll come Monday 7:30am for the Ready Check.

I'm on my way

Running 15 min late

Can we change the day?

Write a message ›

More · staff job links ›

My work Add a job Money My business

Home Insulation Victoria **INSTALLER** Stage 2: Ready Check

M2 · Screen: Job page, needs finishing

When: Mitti form completed with something missing.

Home Insulation Victoria DS

‹ My work

7 Lum Road, Wheelers Hill

Mei Chen

HV-3151 · Your customer

Call | Text | Directions

NEXT

Add 4 things in Mitti

Ready Check done Mon 26 Oct at 7:30am. The form is still missing:

- [ ] Your price
- [ ] The owner's email
- [ ] The ceiling area
- [ ] The insulation product

Open Mitti form

Press Complete only when it's fully finished — that sends Mei her quote.

READY CHECK

Visit	Done Mon 26 Oct at 7:30am
Mitti form	4 things missing

QUOTE

Status	Not drafted yet · waiting on the form

WHO'S DOING THIS

Ready Check — Deep Singh · done

Install day — Not yet

Choose who does the install once a day is booked.

MESSAGES

You · Fri 24 Oct

Hi Mei, I'll come Monday 7:30am for the Ready Check.

I'm on my way

Running 15 min late

Can we change the day?

Write a message ›

More · staff job links ›

Home Insulation Victoria **INSTALLER** Stage 2: Ready Check

M2 · Screen: Job page, change allocation

When: Installer hands a job back or changes who does it.

Home Insulation Victoria DS

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Install booked · Tue 27 Oct at 7:30am

Install by Fri 21 Nov · 25 days left.

QUOTE

Status — Accepted Wed 22 Oct

Your pay for this job — $2,890

Your agreed rates × 137.6 m² measured at the Ready Check, incl. 40 m² removal. Paid within 7 days of our approval after the install.

READY CHECK

Who does the install day?

Tue 27 Oct at 7:30am · Glen Waverley. The Mitti install form and the 6:30am text go to this person.

Deep Singh
owner · 0412 000 111 · Mitti ✓
CII cleared

Raj Kumar ✓
installer · 0433 222 333 · Mitti ✓
CII cleared

Tom Brown
installer · 0455 444 555 · Mitti not set
CII being checked · can't do installs

Allocate to Raj

Cancel

Quote and acceptance

HOMEOWNER INSTALLER OFFICE

When the Ready Check is complete and every check passes, the quote is built and sent automatically: the installer's price plus our $349 Accredited Provider fee plus the electrician's safety check, minus the VEU rebate. The office only sees quotes that are held.

WHAT HAPPENS

- Quote email (O18) with a secure link; reminder if unopened (O19).
- Owner accepts, signs the ESC consent form and pays the $349 safety check in one step (P2); confirmation (O22).
- Signed consent copy emailed to the owner (O63).
- Installer told the moment the owner accepts or declines (I23, I24); job page shows quote sent / held / declined.
- Office: 'Quotes to check' in Needs me for anything held.

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- ESC Owner's Consent Form v1 (official): Section 1 prefilled, four Section 2 ticks, signed by the owner on P2; AP part signed by the office. Copy to owner (O63).
- $349 safety-check payment: card (Stripe) at acceptance.

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
HOMEOWNER	O18	Email: Your quote	The moment the Ready Check is complete and every check passes.
HOMEOWNER	O19	Email: your quote is waiting	Reminder while the quote is unopened or unanswered.
HOMEOWNER	P2	Page: your quote, accept and pay $349	Opened from O18: accept, consent form, pay the safety check.
HOMEOWNER	O22	Email: You're in	The moment the owner accepts and pays.
HOMEOWNER	P3	Page: owner consent and booking details	The owner's own page for the job (consent, times, details).
HOMEOWNER	O63	Email: your signed consent form	After acceptance, with the executed ESC consent form attached.
INSTALLER	I23	Email: the owner accepted	The moment the owner accepts.
INSTALLER	I24	Email: the owner declined	The moment the owner declines.
INSTALLER	M2	Screen: Job page, quote sent	While the owner is deciding.
INSTALLER	M2	Screen: Job page, quote held	When a check failed and the office is looking at it.
INSTALLER	M2	Screen: Job page, quote declined	When the owner declines.

HOMEOWNER Stage 3: Quote and acceptance

O18 · Email: Your quote

When: The moment the Ready Check is complete and every check passes.

Hi Helen, your quote is ready.

You save $1,850 on ceiling insulation

YOUR VEU REBATE

You save $1,850

Taken off upfront. Nothing for you to claim.

YOUR PRICE

$2,200.00

incl. GST · full price before rebate ~~$4,050.00~~

824 High Street Road, Glen Waverley VIC 3150
Measured at your Ready Check

View and accept your quote

Your quote

Bradford Gold R5.0 ceiling batts, supplied and installed 137.6 m² × $20.00 per m². VEU-approved (AS/NZS 4859.1), installed by Reinsulate, EEC-certified (AS 3999).	$2,752.00
Old insulation removed and taken away 40 m² × $15.00 per m²	$600.00
Electrical safety check (PIESA) By a licensed electrician, before any insulation goes in	$349.00
Accredited Provider fee	$349.00

Home Insulation Victoria (VEU A003654): your quote, compliance checks, paperwork and rebate claim

Full price incl. GST	**$4,050.00**
VEU rebate Taken off upfront, nothing to claim	**−$1,850.00**
You pay	**$2,200.00**

Not included: electrical fixes, only if the safety check finds any. Quoted separately, nothing done without your OK.

Next: accept and pay $349.00 → electrician safety check → book your install day.

Your price is held until 7 November 2026. Not ready, or not for you? You can let us know on the same page. Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER Stage 3: Quote and acceptance

O19 · Email: your quote is waiting

When: Reminder while the quote is unopened or unanswered.

Helen, your quote is waiting

Just checking you saw it. Your $1,850 rebate is ready to go, and your price is held until **7 November**. Any questions, reply to this email and we'll help.

YOUR VEU REBATE

You save $1,850

Taken off upfront. Nothing for you to claim.

YOUR PRICE

$2,200.00

incl. GST · full price before rebate ~~$4,050.00~~

824 High Street Road, Glen Waverley VIC 3150
Measured at your Ready Check

View and accept your quote

Not ready, or not for you? You can let us know on the same page.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER Stage 3: Quote and acceptance

P2 · Page: your quote, accept and pay $349

When: Opened from O18: accept, consent form, pay the safety check.

Home Insulation Victoria

HV-3117

YOUR QUOTE

Hi Helen, here's your quote

824 High Street Road, Glen Waverley VIC 3150 · Measured at your Ready Check on 28 October · Price held until 7 November 2026

YOUR VEU REBATE

You save $1,850

Taken off upfront. Nothing for you to claim.

YOUR PRICE

$2,200.00

incl. GST · full price before rebate ~~$4,050.00~~

824 High Street Road, Glen Waverley VIC 3150
Measured at your Ready Check

What you're paying for

Bradford Gold R5.0 ceiling batts, supplied and installed 137.6 m² × $20.00 per m². VEU-approved (AS/NZS 4859.1), installed by Reinsulate, EEC-certified (AS 3999).	$2,752.00
Old insulation removed and taken away 40 m² × $15.00 per m²	$600.00
Electrical safety check (PIESA) By a licensed electrician, before any insulation goes in	$349.00
Accredited Provider fee Home Insulation Victoria (VEU A003654): your quote, compliance checks, paperwork and rebate claim	$349.00
Full price incl. GST	**$4,050.00**

VEU rebate −$1,850.00
Taken off upfront, nothing to claim

You pay $2,200.00

Not included: electrical fixes, only if the safety check finds any. Quoted separately, nothing done without your OK.

SAY YES

Two quick things, then sign

Tap each one to read it in full. Plain English, no surprises.

- [x] **I accept this quote and the Customer Agreement**
  Your contract with Home Insulation Victoria for this job. The $1,850 rebate comes off your price now; you'll sign the official rebate form after the install. **Read the agreement ›**

- [ ] **I've read my consumer rights and the payment terms**
  $349 now for the electrical safety check, 10% to book your install day, the rest on install day. Or pay in full any time. **Read in full ›**

Sign

Typing your name here is your signature. We record the time and the exact document you signed.

Your full name

Helen Yang

- [ ] **I'm 18 or over, and I own this home or I'm authorised to sign for the owner**

Type your name again to sign

Type here

Sign and pay $349.00

Tick all three and type your name to sign

Pay the $349 by card or bank transfer, no fees. You'll get your signed copy and invoice by email

Not for me

HOMEOWNER Stage 3: Quote and acceptance

O22 · Email: You're in

When: The moment the owner accepts and pays.

You're in, Helen!

Thanks for accepting your quote. Warmer winters and cooler summers are on the way, with $1,850 off.

PAYMENT RECEIVED

Electrical safety check	**$349.00**
Paid 24 Oct 2026 · bank transfer	**Paid ✓**

Remaining: $1,851.00 (10% to book your install day, the rest on install day)

What happens next

1. **Electrical safety check**
   A licensed electrician will offer you times. They check your wiring, downlights and switchboard are safe to insulate over.
2. **Only if something needs fixing**
   We'll send you a separate quote. Nothing is done without your OK.
3. **Book your install day**
   Reinsulate offers you 3 days. Your install is done within 30 days of the safety check.

See my job

Your signed acceptance and receipt are attached, and always on your job page. Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER Stage 3: Quote and acceptance

P3 · Page: owner consent and booking details

When: The owner's own page for the job (consent, times, details).

Home Insulation Victoria

HV-3117

STEP 1 OF 2 · BOOK YOUR INSTALL

Tuesday 11 November, arriving 7:30am

To lock this in: sign the consent below, then pay your 10% deposit ($185.10). Takes about a minute.

Why we need this: the Victorian Government requires us to tell the Essential Services Commission about every insulation install before it happens, so safety regulators can check the work. This is your consent for us to share the details below with them. It's the Commission's own form.

OWNER'S CONSENT · ESSENTIAL SERVICES COMMISSION

Section 1: Information to be shared

First name	**Helen**
Last name	**Yang**
Installation address	**824 High Street Road, Glen Waverley VIC 3150**
Phone number	**0412 345 678**
Email address	**helen@example.com**

Something wrong? **Correct my details**

Section 2: Declaration by owner

I declare that:

- [x] I am the owner of the property listed above, or I am authorised to provide consent on behalf of the owner.
- [x] the details listed above are complete and accurate.
- [ ] I consent to DC Construction Solutions Pty Ltd trading as Home Insulation Victoria

(VEU Accredited Person A003654) sending the information set out in section 1 of this form to the Essential Services Commission (commission).

☐ I consent to the commission sharing the information set out in section 1 of this form with the Victorian WorkCover Authority (WorkSafe) and/or Energy Safe Victoria (ESV).

Owner signature: type your full name

Type here

Date: 24 October 2026 · Typing your name is your signature. We record the time and the exact form you signed, and email you a copy.

Sign and continue to deposit

Tick all four and type your name to sign

Home Insulation Victoria signs Section 3 (our declaration that we explained this to you) and you get the completed form by email.

HOMEOWNER Stage 3: Quote and acceptance

O63 · Email: your signed consent form

When: After acceptance, with the executed ESC consent form attached.

Your signed consent form

Hi Helen, here's your copy of the owner's consent form you signed for the ceiling insulation at 824 High Street Road, Glen Waverley VIC 3150. It's also on your job page.

See my job

The signed form is attached as a PDF.

Your signed form

Section 1: Information to be shared
First Name: Helen
Last Name: Yang
Address of premises: 824 High Street Road, Glen Waverley VIC 3150
Installation day(s): Tuesday 11 November 2026

Section 2: Owner declarations
☑ I consent to the Accredited Person sharing this information with the Essential Services Commission
☑ I understand the information is used to verify the installation and the VEEC claim
☑ I am the owner or authorised representative of the premises
☑ I have read and understood this form

Owner signature: Helen Yang Date: 24 October 2026
AP representative: Jo Carter (Director) Date: 24 October 2026

Form esc-2026-10-v1 · Record reference e6458b32666a

Questions? Just reply to this email.

INSTALLER Stage 3: Quote and acceptance

I23 · Email: the owner accepted

When: The moment the owner accepts.

Good news, Sam. Helen accepted!

Helen Yang accepted the quote for **824 High Street Road, Glen Waverley** (HV-3117) and has paid for the electrical safety check.

What happens next

1. **Electrical safety check**
   The licensed electrician offers Helen times. Nothing for you to do.
2. **Offer Helen 3 install days**
   Once the safety check clears, your portal asks you to offer 3 days. Helen picks one, or suggests others, until you agree.
3. **Install within 30 days**
   Of the safety check. Your portal shows how many days are left.

Open the job

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

INSTALLER Stage 3: Quote and acceptance

I24 · Email: the owner declined

When: The moment the owner declines.

Sam, Helen has declined the quote

Helen Yang declined the quote for **824 High Street Road, Glen Waverley** (HV-3117).

REASON GIVEN

Price too high

"We've decided to wait until next year."

Nothing more to do; the job is closed. If Helen changes her mind, we can reopen it from our side, just let us know.

See the job

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

INSTALLER Stage 3: Quote and acceptance

M2 · Screen: Job page, quote sent

When: While the owner is deciding.

Home Insulation Victoria

DS

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Nothing for you — Helen has the quote

We sent Helen her quote on Wed 22 Oct. We'll tell you when she accepts. Then we arrange the electrical safety check.

QUOTE

Status	Sent Wed 22 Oct · waiting on the owner
Your pay for this job	$2,890

Your agreed rates × 137.6 m² measured at the Ready Check, incl. 40 m² removal. Paid within 7 days of our approval after the install.

READY CHECK

Visit	Done Mon 20 Oct at 7:30am
Mitti form	Complete · nothing missing

Open Mitti form ›

WHO'S DOING THIS

Ready Check	Deep Singh · done
Install day	Not yet

Choose who does the install once a day is booked.

MESSAGES

Home Insulation Victoria · Wed 22 Oct

Helen's quote has been sent.

I'm on my way

Running 15 min late

Write a message ›

More · staff job links ›

My work | Add a job | Money | My business

Home Insulation Victoria INSTALLER Stage 3: Quote and acceptance

M2 · Screen: Job page, quote held

When: When a check failed and the office is looking at it.

Home Insulation Victoria DS

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Nothing for you — the office is checking the quote

You pressed Complete in Mitti on Tue 21 Oct. We check every quote before it goes to the owner. If we need anything we'll text you.

QUOTE

Status	Being checked by the office
Your pay for this job	$2,890

Your agreed rates × 137.6 m² measured at the Ready Check, incl. 40 m² removal. Paid within 7 days of our approval after the install.

READY CHECK

Visit	Done Mon 20 Oct at 7:30am
Mitti form	Complete · nothing missing

Open Mitti form ›

WHO'S DOING THIS

Ready Check	Deep Singh · done
Install day	Not yet

Choose who does the install once a day is booked.

MESSAGES

Helen · Wed 22 Oct

Thanks, quote accepted. Mornings are best for us.

I've sent you 3 days

I'm on my way

Running 15 min late

Write a message ›

More · staff job links ›

Home Insulation Victoria INSTALLER Stage 3: Quote and acceptance

M2 · Screen: Job page, quote declined

When: When the owner declines.

Home Insulation Victoria DS

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Nothing for you — Helen declined the quote

Declined Fri 24 Oct. The office may follow up with Helen. If the job comes back, it shows in Action needed.

QUOTE

Status	Declined Fri 24 Oct

READY CHECK

Visit	Done Mon 20 Oct at 7:30am
Mitti form	Complete · nothing missing

Open Mitti form ›

MESSAGES

Helen · Wed 22 Oct

Thanks, quote accepted. Mornings are best for us.

I've sent you 3 days | I'm on my way | Running 15 min late

Write a message ›

More · staff job links ›

My work | Add a job | Money | My business

Electrical safety check (PIESA)

HOMEOWNER ELECTRICIAN INSTALLER OFFICE

A licensed electrician does the official Pre-Installation Electrical Safety Assessment within 30 days before the install. Fixes, if any, are quoted and done first.

WHAT HAPPENS

- The PIESA offer goes automatically to the installer's usual electrician (our leads) or the nearest approved REC; the office is told only if nobody can take it.
- Owner picks a time with the electrician (O26).
- The electrician gets the offer (E1, E3) and takes one of the owner's times; the job page (E4) and day page (E5) carry the Mitti PIESA form.
- Electrician completes the PIESA on their form; result synced to the portal (E6); owner and installer get the copy (O28) at least 24 hours before the install.
- Fixes needed: the electrician lists the items at their agreed rates and 3–5 times (E6); fixes quote to the owner (O29); owner approves, pays and picks a time; electrician confirms the booking (E7), does the fixes, uploads the Certificate of Electrical Safety and signs Section C (E8).
- Clearance: installer told the job is ready to book (I65).

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- PIESA (official DEECA form, filled in Mitti by the electrician: PIESA form, page listed under Official forms; signed by the electrician and the owner).
- Certificate of Electrical Safety (when fixes were done).
- ESC installation notification on the Registry, at least 24 hours before the install (robot being built; the office copies the block until the Registry login is in).

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
ELECTRICIAN	E1	Email + text: new PIESA job near you	The moment the automatic offer goes out (usual electrician first, else nearest approved REC; open 24 hours). Wording = the TEST sender's; live electricians see the offer on My work.
ELECTRICIAN	E3	Screen: Job offer, PIESA	Opened from the offer: own agreed rate, the owner's times; tap one and it's booked.
ELECTRICIAN	E3	Screen: Job offer, booked	Straight after taking a time: address and owner contact released for this visit.
HOMEOWNER	O26	Email: pick a time for your electrical safety check	When the electrician offers times.
ELECTRICIAN	E4	Screen: Job page, PIESA booked	Before the visit: Where it's up to, the Mitti PIESA form, evidence, Complete PIESA.
ELECTRICIAN	E5	Screen: Day page, before you start	On the day: three phone checks, Start check, what the portal already knows.
ELECTRICIAN	E6	Screen: Job page, PIESA done, fixes needed	After the Mitti form: synced answers, evidence, fixes items at agreed rates, hours and 3–5 times, Complete PIESA.
HOMEOWNER	O28	Email: your electrical safety check, all clear	When the PIESA passes; copy attached, at least 24h before the install.

FOR	CODE	WHAT IT IS	WHEN
HOMEOWNER	**O29**	Email: your safety check found something to fix	When the PIESA needs electrical fixes; quote to approve and pay.
ELECTRICIAN	**E7**	Screen: Job page, book the electrical fixes	When the owner has approved and paid the fixes quote and picked a time.
ELECTRICIAN	**E8**	Screen: Job page, fixes complete, CoES	After the fixes: Certificate of Electrical Safety upload, Section C sign-off, Pass/Fail.
ELECTRICIAN	**E9**	Screen: Job page, PIESA complete	Electrical clearance in: waiting for the installer; payment timing shown.
INSTALLER	**I65**	Email: cleared for install	The moment electrical clearance is in; offer three install days.
INSTALLER	**M2**	Screen: Job page, PIESA booked	Planning visibility while the electrician's visit is booked.

ELECTRICIAN

Stage 4: Electrical safety check (PIESA)

E1 · Email + text: new PIESA job near you

When: The moment the automatic offer goes out (usual electrician first, else nearest approved REC; open 24 hours). Wording = the TEST sender's; live electricians see the offer on My work.

From the live screen · drawn from src/lib/jo-tradie.server.ts (TEST sender; live electricians see the same offer on My work). Names and figures are examples.

TEXT MESSAGE

HIV: New job in Glen Waverley, your rate $200. The first trade to accept gets the job. https://…/field/offer/…

SUBJECT

New job in Glen Waverley — $200

New job in Glen Waverley

Pre Insulation Electrical Safety Assessment (PIESA) — your rate $200.

About 120 m² of ceiling. The owner has offered three times. The first trade to accept gets the job.

See the job

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979

Home Insulation Victoria **ELECTRICIAN**

Stage 4: Electrical safety check (PIESA)

E3 · Screen: Job offer, PIESA

When: Opened from the offer: own agreed rate, the owner's times; tap one and it's booked.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.offer.$offerId.tsx (PIESA branch). Names and figures are examples.

New job · Closes in 21h 10m

Pre Insulation Electrical Safety Assessment (PIESA) in Glen Waverley

About 6 km away

$200.00 your rate for this job

TO TAKE THIS JOB

Pick one of the owner's times

Tap a time and it's booked. The address shows once you accept.

- Wed 29 Oct 8:00am
- Thu 30 Oct 10:00am
- Fri 31 Oct 12:00pm

Suggest another time

Not for me

Can't make these? If nobody takes it, you can suggest another time from tomorrow 9:00am.

My work · Money · My business

ELECTRICIAN

Stage 4: Electrical safety check (PIESA)

E3 · Screen: Job offer, booked

When: Straight after taking a time: address and owner contact released for this visit.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.offer.$offerId.tsx (accepted + locked). Names and figures are examples.

Booked

Pre Insulation Electrical Safety Assessment (PIESA) · Wed 29 Oct, 8:00am

Helen Yang
18 Bogong Avenue, Glen Waverley VIC 3150

Call | Text | Directions

Add to calendar

The owner has been told the time.

Open the job page

My work | Money | My business

HOMEOWNER

Stage 4: Electrical safety check (PIESA)

O26 · Email: pick a time for your electrical safety check

When: When the electrician offers times.

Helen, pick a time for your electrical safety check

Spark Electrical, a licensed electrician, has offered these times. Tap the one that suits you and it's booked.

Wednesday 5 November **8:00am ›**

Thursday 6 November **12:30pm ›**

Monday 10 November **7:30am ›**

None suit? **Suggest other days**

⏰ **The 30-day clock**

Your install must happen within 30 days of this safety check. After 30 days the check expires and has to be done again, and a new check may be charged. So once it's done, please book your install day as soon as the installer offers times, and approve any electrical fixes quickly.

At your safety check

The electrician checks your switchboard, ceiling wiring and downlights are safe to insulate over. It's already paid for ($349.00). If anything needs fixing, we'll send you a separate quote first. Nothing is done without your OK.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

ELECTRICIAN

Stage 4: Electrical safety check (PIESA)

E4 · Screen: Job page, PIESA booked

When: Before the visit: Where it's up to, the Mitti PIESA form, evidence, Complete PIESA.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.$jobId.tsx (ElectricianFlow), components/trade/job-status.tsx, components/portal/mitti.tsx. Names and figures are examples.

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

YOUR TURN

Do the PIESA and fill in the form

Call | Text | Directions

WHERE IT'S UP TO

PIESA booked · Wed 29 Oct 8:00–10:00am · You

- ✓ Ready Check — Mon 20 Oct
- ✓ Quote accepted — Wed 22 Oct
- ✓ Safety check paid — Wed 22 Oct
- ● **PIESA** — Expected Wed 29 Oct
- ○ Electrical fixes (if any)
- ○ Fixes paid
- ○ Agreed owner payment
- ○ Install
- ○ Paid in full
- ○ Checked by Home Insulation Victoria
- ○ Paid to you

Your visit: Pre Insulation Electrical Safety Assessment (PIESA)

Installer Ready Check

Measured 137.6 m² · existing insulation: some, removal required · 2 ceiling areas. The installer does the Ready Check, not you.

Mitti electrical assessment · PIESA Assigned

Audit ID	1849302
Assignee	sam@sparkelectrical.com.au
Last sync	—

Open this form in Mitti

Refresh from Mitti

Evidence 0/2 required

Photo of the cables at the switchboard (geotagged)	Required
Photo showing you on site at the property, holding your licence / photo ID (geotagged)	Required

Photos must be taken on the phone with location on; the portal refuses an upload without a location fix.

4 · Electrical fixes items

Standard items are priced from your answers.

None yet.

✓ Complete PIESA

Contact details for this visit

Use these contact details only to arrange and complete this Home Insulation Victoria job. Do not use them for unrelated marketing or future work unless the owner separately agrees.

PIESA
Helen Yang
0412 345 678
helen.yang@example.com

Agree a time directly, then record it in the portal. It is booked only once the other party (or Home Insulation Victoria) confirms it.

History, documents and messages ›

ELECTRICIAN

Stage 4: Electrical safety check (PIESA)

E5 · Screen: Day page, before you start

When: On the day: three phone checks, Start check, what the portal already knows.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.day.$jobId.tsx (safety_check) + trade-view.core PRESTART_CHECKS. Names and figures are examples.

‹ My work

Pre Insulation Electrical Safety Assessment (PIESA) · Yang

18 Bogong Avenue, Glen Waverley · Wed 29 Oct 8:00am

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Before you start

- [ ] Location on for your camera — So every photo is geotagged.
- [ ] Battery over 50% — Bring a power bank if you're low.
- [ ] Onsite form open on this job

Start check

Start stays grey until all three are ticked. If the office is still setting up the onsite form: "Your result will show here once it's in."

What we know

Life support	No
Solar / battery	Yes — rooftop solar
Downlights	14 (from the Ready Check)
Your rate	$200.00 inc GST

Home Insulation Victoria

ELECTRICIAN

Stage 4: Electrical safety check (PIESA)

E6 · Screen: Job page, PIESA done, fixes needed

When: After the Mitti form: synced answers, evidence, fixes items at agreed rates, hours and 3–5 times, Complete PIESA.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.$jobId.tsx (OtherItems, PiesaForm), components/portal/rectification-times.tsx, components/portal/mitti.tsx. Names and figures are examples.

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

YOUR TURN

Do the PIESA and fill in the form

Mitti electrical assessment · PIESA

Waiting for Mitti completion

Audit ID	1849302
Assignee	sam@sparkelectrical.com.au
Last sync	Today 10:42am

Open this form in Mitti

Onsite assessment completed in Mitti. Next: Review and press Complete assessment.

Refresh from Mitti

Electrical assessment (from Mitti – read only)

Downlights	14
Downlights to upgrade	6

Switchboard	ok
RCDs present	Yes
RCDs to install	1
Life support onsite	No
PIESA outcome	fail
Assessment date	29 Oct 2026
Hazards	Non-IC downlights in 2 rooms; RCD missing on lighting circuit

Evidence 3/3 required

Photo of the cables at the switchboard (geotagged)	Uploaded
Photo showing you on site at the property, holding your licence / photo ID (geotagged)	Uploaded
Photo of each hazard listed (one per hazard; geotagged)	Uploaded

Photos must be taken on the phone with location on; the portal refuses an upload without a location fix.

4 · Electrical fixes items

Add from your approved rate schedule

Downlight upgrade to IC-4 LED · light

6 Add

Standard items are priced from your answers.

- Downlight upgrade to IC-4 LED × 6
- RCD installation × 1

Add an "Other" item

Description

Qty Price inc GST

Why is this needed?

Add item

Electrical fixes time and hours

Estimated hours for the electrical fixes work

2.5

Times you can do the work

Choose 3 to 5 times on at least 2 different days. The owner picks one when they approve the quote.

Mon 3 Nov	8–10am	10am–12	12–2pm
Tue 4 Nov	8–10am	10am–12	12–2pm
Wed 5 Nov	8–10am	10am–12	12–2pm

3 of 5 chosen.

✓ Complete PIESA

HOMEOWNER

Stage 4: Electrical safety check (PIESA)

O28 · Email: your electrical safety check, all clear

When: When the PIESA passes; copy attached, at least 24h before the install.

Helen, your electrical safety check: all clear

Here's your copy of the completed pre-installation electrical safety assessment (the PIESA) for your home. The VEU program requires you to have it at least 24 hours before your install, so please keep this email.

SAFETY CHECK RESULT

Safe to insulate ✓

Checked on	**Wednesday 5 November 2026**
Electrician	**Spark Electrical · Lic. 12345 · REC 67890**
Repairs needed	**None**
Your install	**Tuesday 11 November, arriving 7:30am**

View your safety check (PDF)

Your installer has the same copy. One thing to know: **please don't let anyone into the ceiling before the install**. If anything changes up there, the check may need to be done again.

Questions about the safety check? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 4: Electrical safety check (PIESA)

O29 · Email: your safety check found something to fix

When: When the PIESA needs electrical fixes; quote to approve and pay.

Helen, your safety check found something to fix first

Spark Electrical checked your home on Wednesday 5 November. Before insulation can go in safely, a couple of things need fixing. This is common in older homes, and it's the reason the check exists.

What they found

- 4 old downlights that can't be covered by insulation
- One ceiling cable joint that isn't enclosed

Your fixes quote

Replace 4 downlights with IC-rated LEDs 4 × $120.00, supplied and installed	$480.00
Enclose cable joint in a junction box Labour and parts	$200.00
Total incl. GST	**$680.00**

⏰ The 30-day clock

Please approve this quickly. Your safety check expires 30 days after it was done (on **5 December**), and the fixes and the install both need to happen before then. If it expires, a new safety check is needed and may be charged.

Checked by our office before it reached you. Paid in full when you approve, by card (instant, no fee) or bank transfer. Once the fixes are done, you'll get your Certificate of Electrical Safety and can book your install day.

Approve and pay $680.00

Questions about the fixes? Just reply to this email. Nothing is done without your OK.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

ELECTRICIAN

Stage 4: Electrical safety check (PIESA)

E7 · Screen: Job page, book the electrical fixes

When: When the owner has approved and paid the fixes quote and picked a time.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.$jobId.tsx (rectification_scheduling / awaiting_deposit_payment), components/portal/panels.tsx BookingPanel. Names and figures are examples.

‹ My work

4 Loughnan Road, Ringwood

Priya Nair

YOUR TURN

Book the electrical fixes with the owner

Owner approved the fixes quote and picked Tue 4 Nov 10am–12. Confirm the date, or agree another one directly and record it here.

Call | Text | Directions

Rectification booking

Not booked yet.

4 Nov 2026, 10:00 | Confirm date

Electrical fixes booking

Waiting for the owner's payment. Booking opens once paid.

Shown instead of the booking form while the fixes quote is approved but unpaid.

Contact details for this visit

Use these contact details only to arrange and complete this Home Insulation Victoria job. Do not use them for unrelated marketing or future work unless the owner separately agrees.

PIESA
Helen Yang
0412 345 678
helen.yang@example.com

Agree a time directly, then record it in the portal. It is booked only once the other party (or Home Insulation Victoria) confirms it.

History, documents and messages ›

ELECTRICIAN

Stage 4: Electrical safety check (PIESA)

E8 · Screen: Job page, fixes complete, CoES

When: After the fixes: Certificate of Electrical Safety upload, Section C sign-off, Pass/Fail.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.$jobId.tsx (PiesaForm post_rectification), src/lib/piesa-evidence.core.ts q45. Names and figures are examples.

‹ My work

4 Loughnan Road, Ringwood

Priya Nair

YOUR TURN

Do the electrical fixes and sign them off

Electrical fixes complete – record PIESA sign-off

Evidence 3/4 required

Photo of the cables at the switchboard (geotagged)	Uploaded
Photo showing you on site at the property, holding your licence / photo ID (geotagged)	Uploaded
Photo of each hazard listed (one per hazard; geotagged)	Uploaded
Certificate of Electrical Safety (photo or PDF)	Required

Photos must be taken on the phone with location on; the portal refuses an upload without a location fix.

PIESA completion date

4 Nov 2026

☑ I confirm Section C of the completed PIESA has been completed and signed for this electrical fixes work.

Section C signed date

4 Nov 2026

Upload the signed PIESA / CoES evidence above before recording a pass.

Pass | Fail

Fixed on the same visit instead? Answer q30 "Have you completed all of the repair work..." = Yes in the Mitti PIESA form: the CoES number (q31), date (q32) and the certificate file (q45) are asked there and the portal will not count the PIESA as complete without them.

Home Insulation Victoria **ELECTRICIAN**

Stage 4: Electrical safety check (PIESA)

E9 · Screen: Job page, PIESA complete

When: Electrical clearance in: waiting for the installer; payment timing shown.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.$jobId.tsx (locked assessment), src/lib/trade-work.core.ts tradeTurn. Names and figures are examples.

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

WAITING FOR THE INSTALLER — 30 days left

Waiting for the installer

Install must start by Fri 28 Nov

WHERE IT'S UP TO

Installer offering install days · since Wed 29 Oct · Installer

✓ Ready Check	Mon 20 Oct
✓ Quote accepted	Wed 22 Oct
✓ Safety check paid	Wed 22 Oct
✓ PIESA	Wed 29 Oct
– Electrical fixes (if any)	Not needed
– Fixes paid	Not needed
○ Agreed owner payment	
● **Install**	Expected Thu 13 Nov
○ Paid in full	
○ Checked by Home Insulation Victoria	
○ Paid to you	

Pre Insulation Electrical Safety Assessment (PIESA)

Pre Insulation Electrical Safety Assessment (PIESA) complete.

Assessment complete in the portal – Mitti can no longer change it. The signed copy went to the owner and the installer.

History, documents and messages ›

INSTALLER

Stage 4: Electrical safety check (PIESA)

I65 · Email: cleared for install

When: The moment electrical clearance is in; offer three install days.

HV-3117 is cleared for install

The electrical safety check is done. Offer Helen three install days with arrival times from your job page.

⏰ The 30-day clock

Your install must happen within 30 days of this safety check. After 30 days the check expires and has to be done again, and a new check may be charged. So once it's done, please book your install day as soon as the installer offers times, and approve any electrical fixes quickly.

Offer install days

Home Insulation Victoria INSTALLER

Stage 4: Electrical safety check (PIESA)

M2 · Screen: Job page, PIESA booked

When: Planning visibility while the electrician's visit is booked.

Home Insulation Victoria DS

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Nothing for you — safety check booked

Sam Lee (Home Insulation Victoria electrician) does the PIESA on Thu 29 Oct at 9:00am. Once it's cleared, you offer Helen 3 install days within 30 days.

QUOTE

Status	Accepted Wed 22 Oct
Your pay for this job	$2,890

Your agreed rates × 137.6 m² measured at the Ready Check, incl. 40 m² removal. Paid within 7 days of our approval after the install.

Electrician	Sam Lee · PIESA Thu 29 Oct at 9:00am

READY CHECK

Visit	Done Mon 20 Oct at 7:30am
Mitti form	Complete · nothing missing

Open Mitti form ›

WHO'S DOING THIS

Ready Check — Deep Singh · done

Install day — Raj Kumar · CII cleared Change

The Mitti install form and the 6:30am text go to Raj. Only CII-cleared staff can do install days.

MESSAGES

Helen · Wed 22 Oct

Thanks, quote accepted. Mornings are best for us.

I've sent you 3 days | I'm on my way | Running 15 min late

Write a message ›

More · staff job links ›

Booking the install and paying the deposit

HOMEOWNER INSTALLER OFFICE

The installer offers three days with arrival times; the owner takes one or suggests others, until agreed. The install must happen within 30 days of the PIESA. No office step.

WHAT HAPPENS

- Owner picks an install day (O33) and pays the 10% deposit by bank transfer.
- Booking confirmed (O35); if the deposit isn't in within 48 hours the day is held (O35b) and then released (O64).
- Day changed by either side (O42).
- Installer gets the booking with the safety plan link; job page shows the install booked.
- Owner and installer are reminded at 20 and 10 days before the 30-day deadline; the office is alerted only at 10 days with nothing booked.

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- Xero invoice (one invoice per job; deposit and balance by bank transfer or PayID).

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
HOMEOWNER	**O33**	Email: pick your install day	When the installer offers three days with arrival times.
HOMEOWNER	**O35**	Email: Your install is booked	When a day is agreed and the deposit is in.
HOMEOWNER	**O35b**	Email: Your install is booked, deposit due	When a day is agreed and the deposit is still owed (48-hour hold).
HOMEOWNER	**O42**	Email: your install day has changed	When either side moves the day.
HOMEOWNER	**O64**	Email: your install day was released	48 hours after booking with no deposit.
INSTALLER	**M2**	Screen: Job page, install booked	After the day is agreed; safety plan link; crew signing.

HOMEOWNER

Stage 5: Booking the install and paying the deposit

O33 · Email: pick your install day

When: When the installer offers three days with arrival times.

Home Insulation Victoria

Helen, pick your install day

Your safety check is all clear. Reinsulate has offered these days for your insulation install. Tap the one that suits you.

Tuesday 11 November	**8:00am ›**
Thursday 13 November	**12:30pm ›**
Monday 17 November	**7:30am ›**

None suit? **Suggest other days**

Lock in your day

When you tap a day, you'll sign your install consent (the VEU program needs it) and pay a 10% deposit of **$185.10**. That locks in your day (we hold the day for 48 hours while you pay by bank transfer or PayID). The rest, **$1,665.90**, is due on install day, or you can pay in full now. Your install must happen by **4 December**, 30 days after your safety check.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 5: Booking the install and paying the deposit

O35 · Email: Your install is booked

When: When a day is agreed and the deposit is in.

Your install is booked, Helen

Consent signed and deposit received ✓ Your day is locked in.

YOUR INSTALL

Tuesday 11 November
Arriving 7:30am

824 High Street Road, Glen Waverley
Installer: Reinsulate · 0400 000 000

Deposit received today	**$185.10**
Balance due on install day	**$1,665.90**

Receipt attached. Want to pay the balance now? **Pay in full**

⚡ Your power will be off

For safety, the power is switched off while the installer works in your ceiling. Charge phones and laptops beforehand, and plan around the fridge, medical equipment and anyone working from home.

On the day

- An **adult (18+)** at home to let the installer in and sign off at the end
- **Clear the area under the ceiling hatch** and a path to it
- **Move cars** if you can, so the van can park close
- **Keep pets** away from the work area
- Old insulation is being removed, so **expect some dust**. Close internal doors and cover anything near the hatch.

The installer takes before and after photos (the rebate needs them), lays your insulation and tidies up. Most homes take a few hours. The rest, **$1,665.90**, is due on the day.

Need to change the day? Use **Change day** on your job page.
Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 5: Booking the install and paying the deposit

O35b · Email: Your install is booked, deposit due

When: When a day is agreed and the deposit is still owed (48-hour hold).

Your install is booked, Helen

Your day is held until Saturday 1 November, 3:15pm. Pay your deposit to lock it in.

YOUR INSTALL

Thursday 6 November, arriving 8:00am

824 High Street Road, Glen Waverley VIC 3150
Installer: Sam Smith · 0412 345 678

Pay your $184.10 deposit within 48 hours

By bank transfer or PayID.
Account name: DC Construction Solutions Pty Ltd
BSB: to be confirmed · Account: to be confirmed
PayID: to be confirmed
Reference: HV-3117

⚡ **Your power will be off**

For safety, the power is switched off while the installer works in your ceiling. Charge phones and laptops beforehand, and plan around the fridge, medical equipment and anyone working from home.

On the day

- An **adult (18+)** at home to let the installer in and sign off at the end
- **Clear the area under the ceiling hatch** and a path to it
- **Move cars** if you can, so the van can park close

- **Keep pets** away from the work area

The installer takes before and after photos (the rebate needs them), lays your insulation and tidies up. Most homes take a few hours. Your remaining balance is due on the day.

Need to change the day? Use **Change day** on your job page. Questions? Just reply to this email.

See my job

HOMEOWNER

Stage 5: Booking the install and paying the deposit

O42 · Email: your install day has changed

When: When either side moves the day.

Helen, your install day has changed

Reinsulate needed to move your install. Here's the new day and time. Everything else stays the same, and your deposit still holds your booking.

NEW INSTALL DAY

Thursday 13 November

Arriving 7:30am

~~Was Tuesday 11 November, 7:30am~~

824 High Street Road, Glen Waverley

Installer: Reinsulate · 0400 000 000

Doesn't suit? Tap **Change day** on your job page and Reinsulate will offer other days. Remember the power will be off while they work, and the "On the day" checklist from your booking email still applies.

See my job

Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 5: Booking the install and paying the deposit

O64 · Email: your install day was released

When: 48 hours after booking with no deposit.

Helen, your install day was released

Hi Helen, we didn't receive your install deposit in time, so Tuesday 11 November has been released. Your installer will offer new days once it's paid.

Pay your $185.10 deposit by bank transfer or PayID

Account name: Home Insulation Victoria
BSB 082-902 · Account 777966349
Reference: Home Insulation Victoria HV-3117

Once it lands, your installer offers you new days on your job page.

See my job

Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979

INSTALLER

Stage 5: Booking the install and paying the deposit

M2 · Screen: Job page, install booked

When: After the day is agreed; safety plan link; crew signing.

Home Insulation Victoria

DS

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Install booked · Tue 27 Oct at 7:30am

Install by Fri 21 Nov · 25 days left.

TUE 27 7:30am

Consent signed and 10% deposit paid ✓

Raj gets the install form in the 6:30am text.

Change day | Today's job

QUOTE

Status	Accepted Wed 22 Oct
Your pay for this job	$2,890

Your agreed rates × 137.6 m² measured at the Ready Check, incl. 40 m² removal. Paid within 7 days of our approval after the install.

Electrician	PIESA passed Thu 29 Oct · downlight covers needed on the day

READY CHECK

Visit	Done Mon 20 Oct at 7:30am
Mitti form	Complete · nothing missing

Open Mitti form ›

WHO'S DOING THIS

Ready Check — Deep Singh · done

Install day — Raj Kumar · CII cleared Change

The Mitti install form and the 6:30am text go to Raj. Only CII-cleared staff can do install days.

MESSAGES

Helen · Wed 22 Oct

Thanks, quote accepted. Mornings are best for us.

I've sent you 3 days | I'm on my way | Running 15 min late

Write a message ›

More · staff job links ›

Install day

INSTALLER HOMEOWNER

Before the day the crew sign the safety plan on the job page. On the day the lead installer works through the Install day form in Mitti: safety checks, declaration, then the after evidence. Completing the form records the install.

WHAT HAPPENS

- Safety plan (SWMS) on the installer's job page: written by the portal from the job; site note; one-tap signatures; filed as a PDF.
- 6:30am text with the Mitti link. Install day form (Mitti, 45 questions, listed under Official forms).
- The portal fills the official PIISA from the Ready Check, the PIESA and this form; the lead installer signs it before work starts.
- After videos and depth photos per area; lock-out off; completion signature; press Complete.
- Couldn't get in: owner told (O65); installer's Today screen handles it (M4).

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- SWMS / safety plan (portal, WorkSafe Victoria template layout).
- PIISA (official DEECA form, filled by the portal, signed by the lead installer).
- Install day form (Mitti): photos, safety checks, declaration, evidence.

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
INSTALLER	**M4**	Screen: Today	Every morning: today's visits with Mitti links.
INSTALLER	**M4**	Screen: Today, couldn't get in	Install day with no access; owner told (O65).
HOMEOWNER	**O65**	Email: we couldn't get in today	When the installer records no access on install day.

INSTALLER Stage 6: Install day

M4 · Screen: Today

When: Every morning: today's visits with Mitti links.

Home Insulation Victoria

DS

‹ My work

Today · Tue 27 Oct · 8:00am

Install · Patel

12 Wattle Grove, Clayton

Anita Patel · HV-3098 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Start the install in Mitti

PIISA, before and after photos and bag labels all go in the install form. Press Complete when it's fully finished.

- [x] Location on (photos are geotagged)
- [x] Phone charged
- [ ] Power off before you go in the roof

Open install form

⚡ An electrician must be on site

The safety check found downlights to be fitted with covers. Sam Lee (Home Insulation Victoria electrician) arrives 8:00am. Don't start in the roof until Sam says the power is off.

Call Sam ›

THE JOB

Product	Bradford Gold R5.0 ceiling batts
Area	137.6 m² · removal 40 m²

Access — Hatch in hallway · 2 storey

Your pay — $2,890

Your agreed rates × the measured area. Paid within 7 days of our approval.

CREW TODAY

Deep Singh · lead — CII cleared

Raj Kumar — CII cleared

Add a crew member ›

Only CII-cleared staff can be on an install. The crew goes on the PIISA.

Couldn't get in? ›

INSTALLER Stage 6: Install day

M4 · Screen: Today, couldn't get in

When: Install day with no access; owner told (O65).

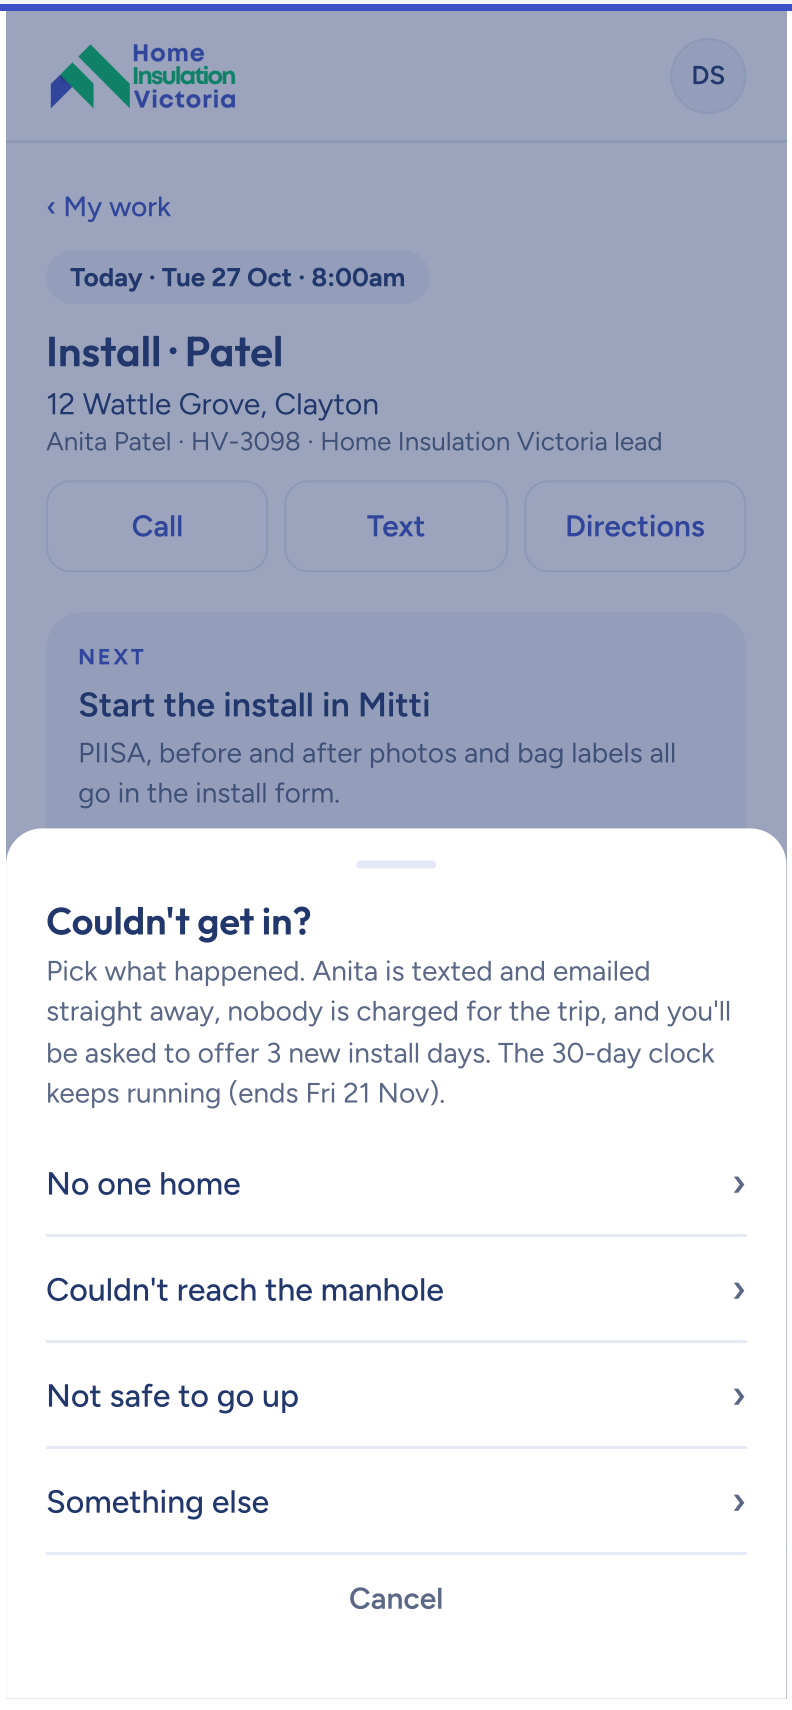

HOMEOWNER Stage 6: Install day

O65 · Email: we couldn't get in today

When: When the installer records no access on install day.

DRAFT – awaiting Jo's approval (decision 215)

Owner text (SMS type install_no_access) – new days not yet offered

Hi Helen, we couldn't get in today for your insulation install. You're not charged anything. Reinsulate will send you new days shortly – see your job: https://estimate.homeinsulationvictoria.com.au/my-job/EXAMPLE Reply STOP to opt out.

Owner text – when the installer offered the 3 new days in the same action

Hi Helen, we couldn't get in today for your insulation install. You're not charged anything. Reinsulate has offered 3 new days – pick one here: https://estimate.homeinsulationvictoria.com.au/my-job/EXAMPLE Reply STOP to opt out.

Email O65 – new days follow (the normal O33 install-days email comes next)

Subject: Helen, we couldn't get in today

Helen, we couldn't get in today

Reinsulate came for your install on Tuesday 27 October but couldn't get in to do the work. No problem — nothing is charged for today, and your quote, rebate and deposit all stay exactly as they are.

What happens next

Reinsulate will send you three new days shortly. You'll get an email with the days to tap, or you

can suggest your own from your job page.

See my job

The 30-day clock keeps running

Your install still needs to happen by **21 November** — that's 30 days after your safety check. After that date a new safety check would be needed, so please pick a day as soon as they come through.

Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979

Email O65 – with the installer's 3 new days included

Subject: Helen, we couldn't get in today

Home Insulation Victoria

Helen, we couldn't get in today

Reinsulate came for your install on Tuesday 27 October but couldn't get in to do the work. No problem — nothing is charged for today, and your quote, rebate and deposit all stay exactly as they are.

Pick a new install day

Reinsulate has offered these days. Tap the one that suits you.

Thursday 29 October 8am ›

Friday 30 October 7:30am ›

Monday 2 November 8am ›

None suit? **Suggest other days**

The 30-day clock keeps running

Your install still needs to happen by **21 November** — that's 30 days after your safety check. After that date a new safety check would be needed, so please pick a day as soon as they come through.

Questions? Just reply to this email.

After the install: rebate form, invoice, completion

HOMEOWNER INSTALLER OFFICE

The owner signs the VEEC assignment form, the balance is paid, the office does the final compliance check and lodges the certificates.

WHAT HAPPENS

- All done email and text (O44) with the rebate form link; reminders days 1, 3, 7 (O61); office alert day 10.
- Owner signs the official VEEC assignment form (P4) after installer and AP have signed; copy emailed within 10 business days (O62).
- Final invoice (O45); balance by bank transfer.
- Completion pack (O47) with the certificate (C49); review request (O51).
- Installer: job page shows complete; installer signs their part of the rebate form on the job page (M2, M4).

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- VEEC Assignment Form v1.1 (official ESC): installer (Part B) → AP (Part A, office) → owner (Section 4).
- Certificate of completion (C49), warranty copy, collection notice to installers.
- ESC Registry: VEEC creation (office).

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
HOMEOWNER	O44	Email: All done	The moment the install is recorded complete (text goes too).
HOMEOWNER	O61	Email: rebate form still needs your signature	Days 1, 3 and 7 after completion while unsigned.
HOMEOWNER	P4	Page: sign your rebate form	Opened from O44/O61; the official VEEC assignment form, Section 4.
HOMEOWNER	O62	Email: your signed rebate form	Within 10 business days of signing; executed PDF attached.
HOMEOWNER	O45	Email: your final invoice	After completion; balance by bank transfer or PayID.
HOMEOWNER	O47	Email: your completion pack	When the balance is paid and the pack is ready.
HOMEOWNER	C49	Certificate of completion	In the completion pack.
HOMEOWNER	O51	Email: how's your home feeling?	Some weeks after completion.
INSTALLER	M2	Screen: Job page, complete	After the install is recorded; payment timing shown.
INSTALLER	M2	Screen: Job page, sign the rebate form	After completion: the installer's part of the VEEC form.
INSTALLER	M4	Screen: Today, sign the rebate form	Same, from the Today screen on the day.

HOMEOWNER

Stage 7: After the install: rebate form, invoice, completion

O44 · Email: All done

When: The moment the install is recorded complete (text goes too).

All done, Helen. Enjoy a warmer home!

Reinsulate finished installing your ceiling insulation today. You should notice the difference straight away: warmer winters, cooler summers and lower heating and cooling bills.

Installed	**137.6 m² Bradford Gold R5.0**
Your VEU rebate	**$1,850 off**
Balance	**Paid in full ✓**

One last thing: sign your rebate form

It confirms what was installed and assigns the rebate you've already had off your price to us, so we can claim it. It takes a minute, and you'll get a copy straight away.

Sign your rebate form

What you'll get from us

1. **Your completion pack**
   Tax invoice, Certificate of Completion, your installer's 1-year workmanship warranty and the 5-year product warranty, care tips and every signed form, in one place.

2. **A copy of your signed rebate form**
   Emailed to you as soon as you sign.

Something not right? Contact Reinsulate first on 0400 000 000. Not sorted? Reply to this email and we'll help.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 7: After the install: rebate form, invoice, completion

O61 · Email: rebate form still needs your signature

When: Days 1, 3 and 7 after completion while unsigned.

Helen, your rebate form still needs your signature

We can't claim your **$1,850** Victorian Energy Upgrades rebate until you've signed it. The rebate has already come off your price, so this is the last step.

It takes a minute on your phone. The form shows your installer, what was installed and the price.

Sign your rebate form

Something on the form look wrong? Reply to this email before signing.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 7: After the install: rebate form, invoice, completion

P4 · Page: sign your rebate form

When: Opened from O44/O61; the official VEEC assignment form, Section 4.

Home Insulation Victoria

HV-3117

ONE LAST THING

Sign your rebate form, Helen

Your insulation was installed on Tuesday 11 November. This official form assigns the rebate you've already had off your price ($1,850) to Home Insulation Victoria so we can claim it. Please check the details and sign. About a minute.

Your rights (Section 1): as the energy consumer, you own the right to create certificates for this upgrade. You're assigning that right to Home Insulation Victoria in return for the $1,850 price reduction you've received. Any issues with the work: contact us first; unresolved issues can go to the Essential Services Commission at veu@esc.vic.gov.au. **Read Section 1 in full ›**

VEEC ASSIGNMENT FORM · ACTIVITY 48 · CEILING INSULATION

Section 2: Activity and personnel details

Accredited person	**Home Insulation Victoria (DC Construction Solutions Pty Ltd), A003654**
Electrician	**Spark Electrical · Lic. 12345 · REC 67890**
Certificate of Electrical Safety	**No rectification work was needed**
Installer	**Reinsulate · Sam Reid · EEC cert 4455**
Installation address	**824 High Street Road, Glen Waverley VIC 3150**
Date installation completed	**11 November 2026**
Area 1	**Under insulated · existing est. R1.0 · removed: Yes**
Product	**48A Bulk batt · Bradford Gold · R5.0 · 137.6 m²**

Price before VEEC incentive	**$4,050.00 incl. GST**
Your payment after incentive	**$2,200.00 incl. GST**
Benefit provided	**Price reduction · $1,850.00**

Something wrong? **Tell us before you sign**

Section 4: Your declaration

I declare that:

- I am the energy consumer, or I am authorised to make this declaration on behalf of the above-named entity that is the consumer
- to the best of my knowledge, the information provided by the installer in Section 2 is correct and complete
- I have been provided with a copy of the completed VEU pre-installation electrical safety assessment form
- I have received an identifiable benefit from Home Insulation Victoria in exchange for assigning my rights to create the VEECs for the above activity
- I understand that by signing this form I am assigning the right to create certificates for the product to Home Insulation Victoria
- the commission has the right to inspect the installation with reasonable notice
- I understand that information on this form will be disclosed to the commission for the purpose of creating certificates under the Victorian Energy Efficiency Target Act 2007 and for related verification, audit and program monitoring purposes
- I consent to the information provided in this form, along with any other supporting documentation or information relating to the activity undertaken at the above premises, being disclosed to the relevant regulator and to the Energy Efficiency Council for compliance related purposes
- I understand that commission may use the details provided on this form to issue commission correspondence.
- I am aware that it is an offence to provide false or misleading information to the commission or any person exercising powers under or in connection with the Victorian Energy Efficiency Target Act 2007.

☐ **I have read and make every declaration above**

Consumer signature: type your full name

Type here

Date: 12 November 2026 · Typing your name is your signature. We record the time and the exact form you signed.

Sign my rebate form

Tick the declaration and type your name to sign

Already signed by your installer and by Home Insulation Victoria. You'll get the completed copy by email straight away.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979

HOMEOWNER

Stage 7: After the install: rebate form, invoice, completion

O62 · Email: your signed rebate form

When: Within 10 business days of signing; executed PDF attached.

Here's your signed rebate form, Helen

Thanks for signing. Your copy of the VEEC assignment form for **HV-3117** is attached and also on your job page. Keep it with your home records.

Signed on 21 November 2026.

See my job

Questions about the rebate scheme? The Essential Services Commission is at veu@esc.vic.gov.au.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 7: After the install: rebate form, invoice, completion

O45 · Email: your final invoice

When: After completion; balance by bank transfer or PayID.

Helen, your install is done. Here's your final invoice

Reinsulate finished today. Your balance is due today, as agreed when you booked. Tap the button to pay by card, and you'll get your receipt straight away.

TAX INVOICE HIV-3117 · 11 NOVEMBER 2026

DC Construction Solutions Pty Ltd trading as Home Insulation Victoria · ABN 44 671 613 979 · VEU Accredited Person A003654

To: Helen Yang, 824 High Street Road, Glen Waverley VIC 3150

Bradford Gold R5.0 ceiling batts, 137.6 m² supplied and installed	$2,752.00
Old insulation removed and taken away, 40 m²	$600.00
Electrical safety check (PIESA)	$349.00
Accredited Provider fee	$349.00
Total incl. GST (GST $368.18)	**$4,050.00**
VEU rebate (price reduction)	**−$1,850.00**
Price after rebate	**$2,200.00**
Paid: safety check (24 Oct)	−$349.00
Paid: deposit (4 Nov)	−$185.10
Balance due today	**$1,665.90**

Pay $1,665.90 by bank transfer

Bank transfer or PayID, reference HV-3117 · Bank details on the invoice · Invoice PDF attached

Once it's paid, we'll send your completion pack: certificate, warranties and all your signed forms. You'll also get a short text asking you to sign your rebate form, if you haven't already.

Something not right with the install? Contact Reinsulate first on 0400 000 000, or reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 7: After the install: rebate form, invoice, completion

O47 · Email: your completion pack

When: When the balance is paid and the pack is ready.

Your completion pack, Helen

Everything about your new ceiling insulation in one place. Keep this email, as it's handy if you sell your home or need your warranty.

📄 **Certificate of Completion**
Product, R-value, area, installer, date and rebate — Download

📄 **Tax invoice**
Paid in full — Download

📄 **Your warranties**
1-year installer workmanship · 5-year product warranty — Download

📄 **Signed forms**
Acceptance, install consent, rebate form, safety check — Download

Something not right?

1. **Contact your installer first**
   Reinsulate · 0400 000 000. Workmanship is covered for 1 year.
2. **Not sorted? Contact us**
   Reply to this email and we'll help sort it out.
3. **Still not resolved?**
   You can contact the Essential Services Commission, which runs the VEU program.

Looking after your insulation

- Don't move, squash or walk on the batts. They work best fluffed up.
- If a tradie works in your ceiling, ask them to put the insulation back as they found it.

- Adding new downlights later? Make sure they're IC-rated, which means they're safe to cover with insulation.

Thanks for choosing Home Insulation Victoria. Your pack is always on your job page too.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

HOMEOWNER

Stage 7: After the install: rebate form, invoice, completion

C49 · Certificate of completion

When: In the completion pack.

Certificate no. HV-3117-C
Issued 12 Nov 2026

CERTIFICATE OF COMPLETION

Ceiling insulation installed

This certifies that ceiling insulation was installed at the home below under the Victorian Energy Upgrades (VEU) program.

Home owner	**Helen Yang**
Address	**824 High Street Road, Glen Waverley VIC 3150**
Installed on	**Tuesday 11 November 2026**
Product	**Bradford Gold R5.0 ceiling batts**
R-value	**R5.0 (AS/NZS 4859.1)**
Area insulated	**137.6 m²**
Old insulation removed	**40 m²**
Installer	**Reinsulate · EEC-certified (CII), installed to AS 3999**
Electrical safety check	**Spark Electrical · cleared 5 Nov 2026**
VEU rebate applied	**$1,850.00**

Warranties: 1-year installer workmanship (Reinsulate) · 5-year manufacturer's product warranty.

Home Insulation Victoria · VEU Accredited Person A003654
DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · homeinsulationvictoria.com.au

HOMEOWNER

Stage 7: After the install: rebate form, invoice, completion

O51 · Email: how's your home feeling?

When: Some weeks after completion.

Helen, how's your home feeling?

It's been a week since Reinsulate installed your ceiling insulation. We'd love to know how we went.

Tap a star

★ ★ ★ ★ ★

Happy with everything? A quick Google review helps other Victorians find the rebate too.

Leave a Google review

Know someone with a cold house?

Send them our free eligibility checker. It takes a minute, and they could get the rebate too.

Send to a friend →

Something not right? Contact Reinsulate first on 0400 000 000, or reply to this email and we'll help.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

INSTALLER

Stage 7: After the install: rebate form, invoice, completion

M2 · Screen: Job page, complete

When: After the install is recorded; payment timing shown.

Home Insulation Victoria

DS

‹ My work

HV-3117 · Glen Waverley

Home Insulation Victoria lead · Job complete Tue 27 Oct

DONE

Nothing more to do

Rebate form signed by you and the owner. The office has checked the photos. Owner contact details are no longer shown.

SUMMARY

Installed	Bradford Gold R5.0 · 137.6 m²
Removed	40 m²
Crew	Raj Kumar, Deep Singh
Your pay	$2,890 · Coming Tue 3 Nov

PAPERWORK

PIISA	Signed Tue 27 Oct
Rebate form Part B	Signed Tue 27 Oct
Owner's part	Signed Wed 28 Oct

See it in Money ›

My work | Add a job | Money | My business

INSTALLER

Stage 7: After the install: rebate form, invoice, completion

M2 · Screen: Job page, sign the rebate form

When: After completion: the installer's part of the VEEC form.

Home Insulation Victoria

DS

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Sign the rebate form

Your part of the VEEC assignment form (Part B): you declare the install facts as the lead installer. Type your name and tap Sign.

- [x] Install form Complete · Tue 27 Oct 2:40pm
- [x] Photos and videos checked by the portal
- [x] Crew on the PIISA: Raj Kumar, Deep Singh

Sign the rebate form

QUOTE

Status	Accepted Wed 22 Oct
Your pay for this job	$2,890

Your agreed rates × 137.6 m² measured at the Ready Check, incl. 40 m² removal. Paid within 7 days of our approval after the install.

Install Done Tue 27 Oct · 137.6 m² · 40 m² removed

READY CHECK

Visit	Done Mon 20 Oct at 7:30am

Mitti form — Complete · nothing missing

Open Mitti form ›

WHO'S DOING THIS

Ready Check — Deep Singh · done

Install day — Raj Kumar · done

MESSAGES

Helen · Wed 22 Oct

Thanks, quote accepted. Mornings are best for us.

I've sent you 3 days | I'm on my way | Running 15 min late

Write a message ›

More · staff job links ›

INSTALLER

Stage 7: After the install: rebate form, invoice, completion

M4 · Screen: Today, sign the rebate form

When: Same, from the Today screen on the day.

Home Insulation Victoria

DS

‹ My work

Today · Tue 27 Oct · done

Install · Patel

12 Wattle Grove, Clayton

Anita Patel · HV-3098 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Sign the rebate form

That's a wrap. One last step: your part of the VEEC assignment form (Part B).

- [x] Install form Complete · 2:40pm
- [x] SWMS and PIISA signed
- [x] Photos and videos checked by the portal

Your full name

Deep Singh

I was the lead installer at 12 Wattle Grove, Clayton on Tue 27 Oct 2026. Bradford Gold R5.0 ceiling batts, 137.6 m², 40 m² removed. The information in Section 2 is true and correct.

Sign the rebate form

THEN

Owner	Anita signs her part by secure link
Office	Checks the photos and signs it off
Your pay	$2,890 · within 7 days of our approval

My work | Add a job | Money | My business

Installer and electrician onboarding, business settings

INSTALLER ELECTRICIAN OFFICE

An installer business applies, is checked (CII certificates, insurance, licences), signs the agreement and is approved. From then on they manage their own business details.

WHAT HAPPENS

- Application received (I53); office reviews (O5 application review).
- Welcome and approval (I54) with the How it works guide (G55).
- ESC privacy collection notice to each installer (I60, P5), copy (I62).
- My business (M7): details, rates, bank, insurance, usual electrician, team, agreement.
- Electrician (REC) businesses register at Join our electrical network (E12): licence, REC number, insurance, supplier rates, bank, REC agreement; approved → welcome email (E13); My business (E11).

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- Installer agreement (signed in the portal). ESC privacy collection notice (per installer). Certificates and insurance on file.
- REC agreement (signed in the portal at registration); electrician licence, REC registration and public liability on file; approved supplier rate card.

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
INSTALLER	I53	Email: we've got your application	When an installer business applies.
OFFICE	O5r	Screen: Application review	When an installer business applies.
INSTALLER	I54	Email: Welcome aboard, you're approved	When the office approves the business.
INSTALLER	G55	Guide: How it works	With the welcome email and on the My business screen.
INSTALLER	I60	Email: one quick step (ESC privacy notice)	To each installer before their first job.
INSTALLER	P5	Page: ESC privacy collection notice	Opened from I60; acknowledged once.
INSTALLER	I62	Email: your copy of the ESC privacy notice	After acknowledging.
ELECTRICIAN	E12	Page: Join our electrical network	When an REC registers (also from an installer's usual-electrician invite).
ELECTRICIAN	E13	Email: You're approved (electrician)	When the office approves the REC business (wording DRAFT until Jo approves).
INSTALLER	M7	Screen: My business	Any time.
INSTALLER	M7	Screen: Business details	Any time.
INSTALLER	M7	Screen: Your rates	Any time; changes go to the office to accept.

FOR	CODE	WHAT IT IS	WHEN
INSTALLER	**M7**	Screen: Bank details	Any time.
INSTALLER	**M7**	Screen: Insurance and licences	Any time; expiries checked.
INSTALLER	**M7**	Screen: My usual electrician	Any time; used for PIESAs on our leads.
INSTALLER	**M7**	Screen: Team, add a member	Any time; new person gets a login link by text.
INSTALLER	**M7**	Screen: Your agreement	Signed at onboarding; readable any time.
INSTALLER	**M7**	Screen: ESC privacy notice	Readable any time.
INSTALLER	**M7**	Screen: How it works	Readable any time.
ELECTRICIAN	**E11**	Screen: My business (electrician)	Any time: team, rates, bank, insurance, REC agreement.

INSTALLER

Stage 8: Installer and electrician onboarding, business settings

I53 · Email: we've got your application

When: When an installer business applies.

Thanks Sam, we've got your application

Reinsulate's application to install under the VEU program with Home Insulation Victoria is in. Here's what happens next.

1. **We check your details**
   CII certification, public liability insurance (min $5 million) and PIISA training. Usually within 2 business days.

2. **You're approved**
   You get an email to set your password, plus an invite to Mitti, the app you'll fill forms in.

3. **Start adding jobs**
   Add your own customers in about 30 seconds, and take the jobs we send you.

If anything's missing from your application we'll email you exactly what we need.

Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

Home Insulation Victoria **OFFICE** Stage 8: Installer and electrician onboarding, business settings

O5r · Screen: Application review

When: When an installer business applies.

Home Insulation Victoria | Needs me | Enquiries | Jobs | **Partners** | Money | More ▾ | Find a job, owner or address | CM

‹ Partners · Applications **Installer** **Received Thu 23 Oct · 1 day ago**

Peninsula Ceilings Pty Ltd

Installer application · Frankston · 2 workers

2 CHECKS OUTSTANDING

Workers comp certificate and Dylan Price's CII are missing — ask for them, or approve now and chase the CII under People.

Ask for the missing items | Approve anyway | Decline

BUSINESS

Name	Peninsula Ceilings Pty Ltd · ABN 62 410 338 915 (valid, active)
Type	Installer · 2 workers
Based	14 Playne Street, Frankston 3199
Contact	Rob Keane, owner · 0417 555 902 · rob@peninsulaceilings.example
Applied	Thu 23 Oct 2026 3:48pm · installer application form

CHECKS BEFORE APPROVAL

- ✓ ABN valid and active
- ✓ Public liability $20m · Allianz · to 8 May 2027 · certificate uploaded
- ✓ Installer agreement v1.16 signed by Rob Keane · 23 Oct 2026
- ✓ Schedule of rates agreed · effective on approval
- ! CII certificates · 1 of 2 uploaded (Rob Keane Level 2 · Dylan Price missing)
- ✓ Bank details given · Peninsula Ceilings Pty Ltd · 063-••• ••••8821
- ✗ Workers comp certificate not uploaded

PEOPLE · 2

Rob Keane · owner, lead installer	CII Level 2 to 3 Aug 2027 · uploaded
Dylan Price · installer	CII not uploaded · asked on the form

RATES PROPOSED

Ceiling batts R5.0 · $23.90/m²	proposed
Ceiling batts R4.0 · $20.50/m²	proposed
Minimum job · $850	proposed
Usual electrician	none named · HIV electrician for PIESAs

COVERAGE REQUESTED

Areas	Mornington Peninsula · Frankston · Carrum Downs
Postcodes	3195–3199 · 3910–3944
Radius	Up to 35 km from Frankston

DOCUMENTS SENT · 4

Installer application form	23 Oct 2026 · PDF	View
Public liability certificate · Allianz	23 Oct 2026 · PDF	View
Installer agreement v1.16 · signed	23 Oct 2026 · PDF	View
CII certificate · Rob Keane	23 Oct 2026 · PDF	View

On approval: welcome email and the 2-minute guide go out, the business appears under Approved, each person gets the ESC privacy notice link and a Mitti invite, and CII certificates are verified under People before anyone is cleared for crews.

INSTALLER

Stage 8: Installer and electrician onboarding, business settings

I54 · Email: Welcome aboard, you're approved

When: When the office approves the business.

Welcome aboard, Sam. You're approved!

Reinsulate can now take VEU ceiling insulation jobs through Home Insulation Victoria. Here's what that gets you:

- **Jobs sent to you**, plus add your own customers
- **Your price, never marked up.** We only add our $349 AP fee
- **Quotes, electrician, compliance and rebate paperwork** handled by us

Set your password

New to how we work?

Read the 2-minute guide: Ready Checks, Mitti, your jobs, our leads and getting paid.

Read the guide →

Questions? Just reply to this email.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

INSTALLER

Stage 8: Installer and electrician onboarding, business settings

G55 · Guide: How it works

When: With the welcome email and on the My business screen.

INSTALLER GUIDE

Getting every job paid

We check every form and photo before we claim the rebate. If anything's missing, we can't claim it, and the job can't be paid.

Every job

1 **The job starts**

You · installer portal

Your own customer: tap **Add a job** and enter their details exactly and in full.

Our lead: we text and email you the job. Offer the owner three Ready Check times within 24 hours.

2 **Ready Check**

You · Mitti

Fill in as much as you can. Press **Complete** only when it's finished: that sends the owner their quote.

3 **Electrical safety check**

Electrician

We arrange it once the owner accepts. You get the PIESA at least 24 hours before install.

4

Install day

You · Mitti

Follow the install form from the 6:30am text, top to bottom: SWMS, PIISA, then the photos.

- Crew with photo ID
- Switchboard locked out
- Product label
- Before video
- New depth, with ruler
- 360° finished video
- Floor plan

5

Sign off

You · installer portal

Press **Complete** in Mitti, then sign your part of the rebate form on the job.

30-day rule

Install within 30 days of the electrical safety check, or a new one is needed. Book install days promptly.

Photos must be taken live at the property on the day (geotagged and timed). The lead installer signs personally.

Getting paid: your customers when the owner pays the balance; our leads 7 days after we approve the job. We never mark up your price.

INSTALLER

Stage 8: Installer and electrician onboarding, business settings

I60 · Email: one quick step (ESC privacy notice)

When: To each installer before their first job.

One quick step, Sam

Before we can register you as a VEU installer, the Essential Services Commission requires us to give you their privacy notice.

Read it and tick. It takes a minute and you don't need to sign in.

Read and tick the notice

Until it's done, you can't be put on a job for Smith Insulation.

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979 · Unsubscribe

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

P5 · Page: ESC privacy collection notice

When: Opened from I60; acknowledged once.

‹ My business

Privacy notice for your installers

The Essential Services Commission requires every installer to read this notice before we register them for the VEU program. Each person ticks their own name.

VEU Scheme Participant Privacy Collection Notice

Version 1.0 – 1 October 2026

The Essential Services Commission (commission) collects personal information about scheme participants (installers). We usually collect this information from the accredited person for whom you undertake activities, including through the VEEC assignment form. The information may include your name, date of birth, company, contact details, licence and certification details and evidence of training. We collect this information to:

- assess whether scheme participants and accredited persons have undertaken prescribed activities in accordance with Victorian Energy Upgrades (VEU) program requirements, including applicable training and competency requirements for scheme participants
- assess whether Victorian Energy Efficiency Certificates (VEECs) created for prescribed activities are eligible for registration
- perform our functions under the Victorian Energy Efficiency Target Act 2007 (VEET Act) and the Essential Services Commission Act 2001 including accreditations, compliance monitoring, enforcement, and reporting.

The commission may use and disclose a scheme participant's personal information:

- with the Energy Efficiency Council and other certification or training bodies to verify your certification and training
- for the purpose of performing the commission's functions or exercising powers under the VEET

Act

- with other persons or organisations for the purpose of those persons or organisations performing their functions and powers, including:
- government departments, including the Department of Energy, Environment and Climate Action;
- Energy Safe Victoria, WorkSafe Victoria and other State, Territory or Commonwealth regulators
- persons administering other energy efficiency schemes;
- State, Territory or Commonwealth police.

The commission handles personal information in accordance with the Privacy and Data Protection Act 2014 and our privacy and confidential information policy.

If you do not provide this information, you may not be able to undertake prescribed activities, or parts of activities, for an accredited person and VEECs for the prescribed activity may not be eligible for registration.

If you have any questions about how your personal information will be handled or would like to access or correct your personal information, you can contact the commission on (03) 9032 1300 or privacy@esc.vic.gov.au.

Your installers

- [x] **Sam Reid (lead installer)**
  I have read the Essential Services Commission's VEU Scheme Participant Privacy Collection Notice and understand my details may be disclosed to the commission and shared with the Energy Efficiency Council.
  Acknowledged 24 Oct 2026, 2:15pm

- [ ] **Priya Nair**
  I have read the Essential Services Commission's VEU Scheme Participant Privacy Collection Notice and understand my details may be disclosed to the commission and shared with the Energy Efficiency Council.

Tom Walsh

I have read the Essential Services Commission's VEU Scheme Participant Privacy Collection Notice and understand my details may be disclosed to the commission and shared with the Energy Efficiency Council.

Each person should tick their own box. We record the name, date and time, and email them a copy. Add a new installer under **My team** and they'll see this notice first.

Save acknowledgements

INSTALLER

Stage 8: Installer and electrician onboarding, business settings

I62 · Email: your copy of the ESC privacy notice

When: After acknowledging.

Your copy of the ESC privacy collection notice

Hi Sam,

Here is your copy of the Essential Services Commission's VEU Scheme Participant Privacy Collection Notice, which you acknowledged on 24 October 2026 at 12:00 pm. Your details may be disclosed to the commission and shared with the Energy Efficiency Council.

VEU Scheme Participant Privacy Collection Notice
Version 1.0 – 1 October 2026
The Essential Services Commission (commission) collects personal information about scheme participants (installers). We usually collect this information from the accredited person for whom you undertake activities, including through the VEEC assignment form. The information may include your name, date of birth, company, contact details, licence and certification details and evidence of training. We collect this information to:

- assess whether scheme participants and accredited persons have undertaken prescribed activities in accordance with Victorian Energy Upgrades (VEU) program requirements, including applicable training and competency requirements for scheme participants
- assess whether Victorian Energy Efficiency Certificates (VEECs) created for prescribed activities are eligible for registration
- perform our functions under the Victorian Energy Efficiency Target Act 2007 (VEET Act) and the

Essential Services Commission Act 2001 including accreditations, compliance monitoring, enforcement, and reporting.

The commission may use and disclose a scheme participant's personal information:

- with the Energy Efficiency Council and other certification or training bodies to verify your certification and training
- for the purpose of performing the commission's functions or exercising powers under the VEET Act
- with other persons or organisations for the purpose of those persons or organisations performing their functions and powers, including:
- – government departments, including the Department of Energy, Environment and Climate Action;
- – Energy Safe Victoria, WorkSafe Victoria and other State, Territory or Commonwealth regulators
- – persons administering other energy efficiency schemes;
- – State, Territory or Commonwealth police.

The commission handles personal information in accordance with the Privacy and Data Protection Act 2014 and our privacy and confidential information policy.

If you do not provide this information, you may not be able to undertake prescribed activities, or parts of activities, for an accredited person and VEECs for the prescribed activity may not be eligible for registration.

If you have any questions about how your personal information will be handled or would like to access or correct your personal information, you can contact the commission on (03) 9032 1300 or privacy@esc.vic.gov.au.

Just reply to this email if you have any questions.

ELECTRICIAN

Stage 8: Installer and electrician onboarding, business settings

E12 · Page: Join our electrical network

When: When an REC registers (also from an installer's usual-electrician invite).

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/electrician-onboarding.tsx + src/lib/rec-onboarding.core.ts. Names and figures are examples.

REC PARTNERS

Join our electrical network

Register your REC with Home Insulation Victoria.

What you'll need

- ✓ REC registration + ABN
- ✓ Your personal Victorian electrician licence
- ✓ Public liability Certificate of Currency
- ✓ Your supplier rates + bank details

Start registration →

Save your progress after each step.

The steps

1. About you
2. Business details
3. Business address
4. Public liability insurance
5. Home Insulation Victoria work
6. Where you work
7. Availability

8 Rates

9 Bank details

10 Sign the REC agreement

Rates asked: PIESA visit, installation-day attendance, the mandatory fixes items (downlight upgrade to IC-4 LED, switchboard upgrade, RCD installation, TPS cable replacement, exhaust fan clearance guard), CoES fee, your other repeatable items. Supplier rates: Home Insulation Victoria sets the customer price.

Invited by an installer

"Hi Sam, Deep's Insulation has chosen you as their preferred electrician" — the same registration, opened from the installer's invite link (usual electrician, decision 157).

ELECTRICIAN

Stage 8: Installer and electrician onboarding, business settings

E13 · Email: You're approved (electrician)

When: When the office approves the REC business (wording DRAFT until Jo approves).

From the live screen · drawn from src/lib/partner-email.core.ts partnerWelcomeEmail (trade electrician) · wording from test-approval.core.ts (DRAFT until Jo approves). Names and figures are examples.

TEXT MESSAGE

HIV: Welcome aboard! Spark Electrical is approved ✅ Set your password and finish setup (2 mins): https://...

Home Insulation Victoria

SUBJECT

You're approved — welcome to Home Insulation Victoria

Welcome aboard, Sam

Spark Electrical is approved as a Home Insulation Victoria partner.

Tap the button to set your password and sign in to your online portal. The link works once and expires in 24 hours.

Your sign-in email is sam@sparkelectrical.com.au.

Set my password

Home Insulation Victoria · VEU Accredited Person A003654 · DC Construction Solutions Pty Ltd · ABN 44 671 613 979

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: My business

When: Any time.

Home Insulation Victoria DS

My business

Reinsulate · Approved partner since 3 Oct 2026

Taking new jobs

NEXT

Your public liability insurance runs out in 18 days

Expires Wed 11 Nov. Upload the renewed certificate so offers keep coming.

Upload renewed insurance

TEAM

Deep Singh · owner
0412 000 111 · Mitti login ✓ · Privacy notice ✓
CII cleared · expires 14 Mar 2027 ›

Raj Kumar · installer
0433 222 333 · Mitti login ✓ · Privacy notice ✓
CII cleared · expires 30 Jun 2027 ›

Tom Brown · installer
0455 444 555 · Mitti login not set · Privacy notice outstanding
CII being checked · not on installs yet ›

Add a team member ›

Ready Checks can go to anyone listed here. Install days only to CII-cleared people who've acknowledged the privacy notice.

BUSINESS FILE

My usual electrician
Sam Lee · REC 28841 · $280 inc GST per safety check ›

Business details
Reinsulate Pty Ltd · ABN 61 123 456 789 · South-east Melbourne ›

Your rates
Agreed 3 Oct 2026 · Request a change ›

Bank details
Reinsulate Pty Ltd · BSB 063-xxx · account ending 4471 ›

Insurance and licences
Public liability expires 11 Nov · Workers comp current ›

Your agreement
v1.16 · signed by Deep Singh, 3 Oct 2026 · View PDF ›

ESC privacy notice
1 to acknowledge · Tom Brown ›

How it works
The 2-minute guide: every job, the 30 days, getting paid ›

Sign out

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: Business details

When: Any time.

Home Insulation Victoria DS

‹ My business

Business details

What we have on file. Ask us if anything needs changing.

BUSINESS

Business name	Reinsulate
Legal name	Reinsulate Pty Ltd
ABN	61 123 456 789
Phone	0412 000 111
Email	deep@reinsulate.com.au
Address	4/22 Trade Court, Dandenong South VIC 3175

WHERE YOU WORK

Areas	South-east Melbourne · Glen Waverley, Mulgrave, Clayton, Dandenong, Rowville, Wheelers Hill
Travel	Up to about 40 km from Dandenong South

Ask us to change something

Changes go to the office. We'll confirm by text.

My work | Add a job | Money | **My business**

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: Your rates

When: Any time; changes go to the office to accept.

Home Insulation Victoria

DS

‹ My business

Your rates

What we pay you on our leads, as agreed. Inc GST. On your own customers you charge what you like.

AGREED 3 OCT 2026

Ceiling batts R5.0, supplied and installed	$18.00 per m²
Ceiling batts R6.0, supplied and installed	$20.50 per m²
Ceiling batts R7.0, supplied and installed	$23.00 per m²
Old insulation removed and taken away	$9.00 per m²
Difficult access (over 500 m² or restricted roof)	$150 per job

REQUEST A RATE CHANGE

Which rate, and what you'd like it to be (inc GST)

Ceiling batts R5.0 to $19.50 per m² from 1 Dec — material cost has gone up.

Send the request

The office replies by text. Your current rates apply until a change is agreed.

My work | Add a job | Money | **My business**

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: Bank details

When: Any time.

Home Insulation Victoria DS

‹ My business

Bank details

Where we pay you.

ON FILE

Account name	Reinsulate Pty Ltd
BSB	063-xxx
Account number	•••• 4471
Updated	3 Oct 2026 by Deep Singh

CHANGE BANK DETAILS

Account name

Reinsulate Pty Ltd

BSB

063-xxx

Account number

Save bank details

For safety, we text you a code before the change takes effect, and the office confirms the first payment to a new account.

My work Add a job Money **My business**

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: Insurance and licences

When: Any time; expiries checked.

Home Insulation Victoria DS

‹ My business

Insurance and licences

Keep these current to keep receiving job offers. Lapsed public liability stops offers and install starts until the renewed certificate is uploaded.

ON FILE

Public liability View
Expires Wed 11 Nov 2026 · 18 days

Workers compensation View
Current · expires 30 Jun 2027

Installer certificate (CII) · Deep Singh View
Current · expires 14 Mar 2027

UPLOAD A RENEWED CERTIFICATE

Which one?

Public liability ▾

Choose a file or take a photo
PDF or photo of the certificate

Upload

The office checks every certificate. It shows as Current here once it's verified.

My work | Add a job | Money | **My business**

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: My usual electrician

When: Any time; used for PIESAs on our leads.

Home Insulation Victoria

DS

‹ My business

My usual electrician

Does the electrical safety check on our leads by default, if they're an approved Home Insulation Victoria electrician.

ON FILE

Name	Sam Lee
Business	Lee Electrical Pty Ltd
Licence / REC	REC 28841
Mobile	0400 123 456
Price per safety check	$280 inc GST · agreed at onboarding
Status	Approved HIV electrician

Changed 3 Oct 2026 by Deep Singh. Every change is kept as history.

Change my usual electrician

If your electrician isn't approved with us yet, we use our own electrician until they are. The owner still pays us $349 for the safety check.

My work | Add a job | Money | **My business**

INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: Team, add a member

When: Any time; new person gets a login link by text.

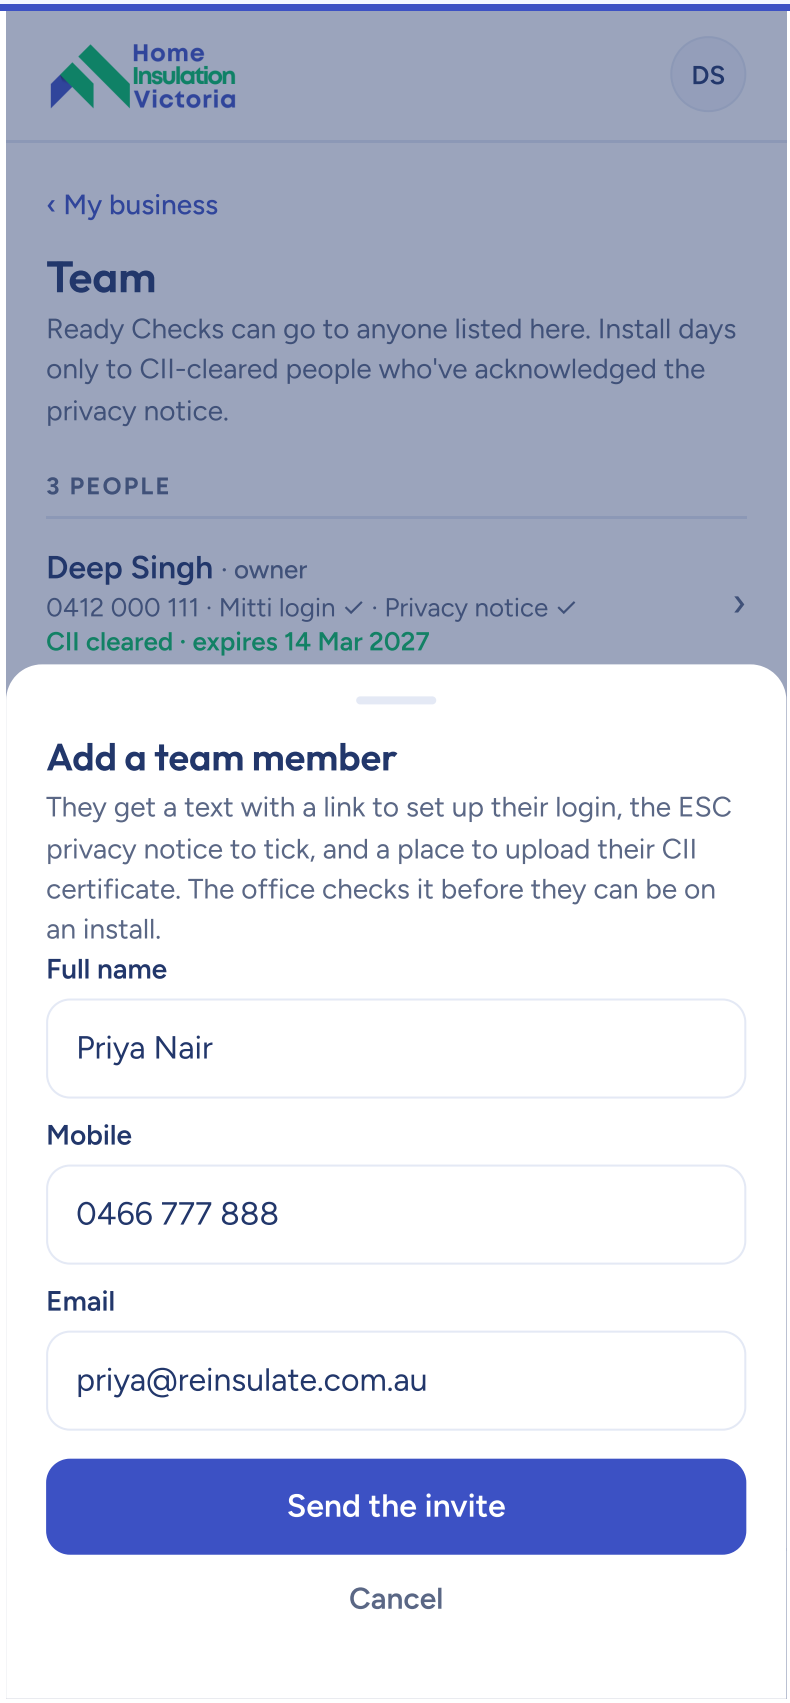

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: Your agreement

When: Signed at onboarding; readable any time.

Home Insulation Victoria

DS

‹ My business

Your agreement

Your signed Home Insulation Victoria partner agreement.

SIGNED

Version	v1.16
Signed by	Deep Singh, director
On	Fri 3 Oct 2026, 2:14pm
Status	In force

WHAT IT COVERS

- Your rates on our leads and the free Ready Check visit
- Pay within 7 days of our approval (your own customers: once the owner pays their balance)
- Install within 30 days of the safety check, or whoever's move it was pays for a new one
- Photos, forms and the rebate form on every job

View the PDF

To change anything in the agreement, ask the office.

My work | Add a job | Money | **My business**

Home Insulation Victoria INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: ESC privacy notice

When: Readable any time.

Home Insulation Victoria DS

‹ My business

ESC privacy notice

The Essential Services Commission's VEU Scheme Participant Privacy Collection Notice. Every installer person ticks it themselves before we can register them as a VEU installer.

YOUR TEAM

Deep Singh
Acknowledged 3 Oct 2026

Raj Kumar
Acknowledged 6 Oct 2026

Tom Brown
Not yet · link sent Tue 21 Oct, reminder Fri 24 Oct
Send again

THE NOTICE

Version 1.0 – 1 October 2026

The Essential Services Commission (commission) collects personal information about scheme participants (installers). We usually collect this information from the accredited person for whom you undertake activities...

Read the full notice ›

Each person ticks from their own link. You can't tick for someone else. A copy is emailed to them.

My work | Add a job | Money | **My business**

INSTALLER

Stage 8: Installer and electrician onboarding, business settings

M7 · Screen: How it works

When: Readable any time.

Home Insulation Victoria

DS

‹ My business

INSTALLER GUIDE

How every job works

Two minutes. Five steps, the 30 days, getting paid.

1 **Get the job**

Your own customer: Add a job and enter their details exactly and in full. **Our lead:** we text and email you the job. Offer the owner three Ready Check times within 24 hours.

2 **Ready Check**

Fill in as much as you can in Mitti. Press Complete only when it's finished: that sends the owner their quote.

3 **Safety check**

We arrange it once the owner accepts. You get the PIESA at least 24 hours before install.

4 **Install days**

Once the safety check is cleared, offer the owner 3 days with arrival times. Install within 30 days of the electrical safety check, or a new one is needed.

5 **Install day**

Follow the install form from the 6:30am text, top to bottom: SWMS, PIISA, then the photos. Press Complete in Mitti, then sign your part of the rebate form on the job.

GETTING EVERY JOB PAID

We check every form and photo before we claim the rebate. If anything's missing, we can't claim it, and the job can't be paid.

Photos must be taken live at the property on the day (geotagged and timed). The lead installer signs personally.

Getting paid: your customers when the owner pays the balance; our leads 7 days after we approve the job. We never mark up your price.

Back to My work

Home Insulation Victoria **ELECTRICIAN**

Stage 8: Installer and electrician onboarding, business settings

E11 · Screen: My business (electrician)

When: Any time: team, rates, bank, insurance, REC agreement.

Home Insulation Victoria SL

From the live screen · drawn from src/routes/_authenticated/field.business.tsx (kind electrician) + trade-view.core. Names and figures are examples.

My business

Spark Electrical · Approved partner since 3 Oct 2026

Taking new jobs

NEXT

Your public liability insurance runs out in 24 days

Expires Tue 18 Nov. Upload the renewed certificate so offers keep coming.

Upload renewed insurance

TEAM

Sam Lee · electrician
0411 222 333 · sam@sparkelectrical.com.au · licence to 30 Jun 2027 ›

Add a team member ›

BUSINESS FILE

Business details
ABN 44 123 456 789 · REC 12345 · 0411 222 333 ›

Your rates
PIESA $200 · fixes schedule agreed 3 Oct 2026 ›

Bank details
BSB 063-xxx · account •••• 4821 ›

Insurance and licences
Public liability expires in 24 days ›

Your agreement
REC agreement signed 3 Oct 2026 ›

How it works
The 2-minute guide: every job, the 30 days, getting paid ›

Sign out

The trade portal, every day

INSTALLER ELECTRICIAN

Six screens on the phone for installers; the electrician uses the same portal with My work, Job offer, Job page, Money and My business. Everything that needs a trade arrives by text with a link; otherwise they only do their visits.

WHAT HAPPENS

- Installer: My work (M1), Job page (M2), Add a job (M3), Today (M4), Job offer (M5), Money (M6), My business (M7).
- Electrician: My work (E2), Job offer (E3), Job page (E4–E9), Money (E10), My business (E11).

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
INSTALLER	**M1**	Screen: My work	Home screen: jobs needing the installer, then the rest.
INSTALLER	**M1**	Screen: My work, empty	No jobs yet.
INSTALLER	**M1**	Screen: My work, more offers	Several open offers.
INSTALLER	**M2**	Screen: Job page	One page per job: next step, status, Mitti links, safety plan, money.
INSTALLER	**M6**	Screen: Money	What's owed and paid, per job.
INSTALLER	**M6**	Screen: Money, all paid	Nothing outstanding.
INSTALLER	**M6**	Screen: Money, job detail	One job's money.
ELECTRICIAN	**E2**	Screen: My work (electrician)	Home screen: offers, Needs me, booked visits, every job's status line.
ELECTRICIAN	**E10**	Screen: Money (electrician)	Any time: own visit rates only; owner-direct work listed, never paid by us.

Home Insulation Victoria **INSTALLER** Stage 9: The trade portal, every day

M1 · Screen: My work

When: Home screen: jobs needing the installer, then the rest.

Home Insulation Victoria DS

Hello Deep

3 jobs booked this week.

1 NEW JOB OFFER

Ready Check in Glen Waverley

About 120 m² · Home Insulation Victoria lead

Closes in 23h 10m

View offer

COMING UP

MON 26 7:30am — **Ready Check · Wang** — 5 Somerset Court, Mulgrave ›

TUE 27 8:00am — **Install · Patel** — 12 Wattle Grove, Clayton ›

THU 29 7:00am — **Install · Nguyen** — 41 Jells Road, Wheelers Hill ›

ACTION NEEDED · 3

5 Somerset Court, Mulgrave ›
HV-3066 · Your customer
Next: finish the Mitti form (price missing)

18 Bogong Avenue, Glen Waverley ›
HV-3117 · Home Insulation Victoria lead
Next: offer 3 install days by 21 Nov

7 Lum Road, Wheelers Hill ›
HV-3151 · Your customer
Next: enter the Ready Check day

IN PROGRESS · 3

12 Wattle Grove, Clayton
HV-3098 · Home Insulation Victoria lead ›
Next: install Tue 27 Oct at 8:00am

41 Jells Road, Wheelers Hill
HV-3102 · Your customer ›
Next: install Thu 29 Oct at 7:00am

3 Ferntree Place, Mount Waverley
HV-3089 · Home Insulation Victoria lead ›
Next: nothing yet — owner has the quote

DONE · 2

HV-3041 · Notting Hill
Your customer · Job complete 16 Oct ›

HV-3022 · Oakleigh
Home Insulation Victoria lead · Job complete 9 Oct ›

THIS MONTH
4 installs done

$6,840 paid
Money ›

My work | Add a job | Money | My business

Home Insulation Victoria INSTALLER Stage 9: The trade portal, every day

M1 · Screen: My work, empty

When: No jobs yet.

Home Insulation Victoria DS

Hello Deep

No jobs booked this week. New job offers will appear here.

COMING UP

Nothing booked yet.

ACTION NEEDED

Nothing needs you right now. When we send you a job, or you add your own, it shows here.

Add a job

IN PROGRESS

No jobs in progress.

DONE

No finished jobs yet.

THIS MONTH
No installs done yet

$0 paid
Money ›

My work | Add a job | Money | My business

Home Insulation Victoria INSTALLER Stage 9: The trade portal, every day

M1 · Screen: My work, more offers

When: Several open offers.

Home Insulation Victoria DS

Hello Deep

3 jobs booked this week.

3 NEW JOB OFFERS

Ready Check in Glen Waverley

Owner says ~120 m² · Home Insulation Victoria lead

Closes in 23h 10m

View offer

JOB OFFERS · 3

Ready Check in Glen Waverley ›
Owner says ~120 m² · Home Insulation Victoria lead
Closes in 23h 10m

Ready Check in Mulgrave ›
No size yet · Home Insulation Victoria lead
Closes in 19h 40m

Ready Check in Clayton South ›
Owner says ~95 m² · Home Insulation Victoria lead
Closes in 6h 05m

Each offer is only for you and stays open 24 hours. Open one to offer the owner 3 Ready Check times.

COMING UP

3 visits booked · see My work

My work | Add a job | Money | My business

Home Insulation Victoria **INSTALLER** Stage 9: The trade portal, every day

M2 · Screen: Job page

When: One page per job: next step, status, Mitti links, safety plan, money.

Home Insulation Victoria DS

‹ My work

18 Bogong Avenue, Glen Waverley

Helen Yang

HV-3117 · Home Insulation Victoria lead

Call | Text | Directions

NEXT

Offer Helen 3 install days

Safety check cleared 22 Oct · Install by Fri 21 Nov · 28 days left

✓ Tue 27 Oct | Wed 28 Oct | ✓ Thu 29 Oct

Fri 30 Oct | ✓ Mon 2 Nov | More days

Arrival time for each day

Tue 27 Oct 7:30am ▾

Thu 29 Oct 8:00am ▾

Mon 2 Nov 12:30pm ▾

Helen sees the exact time, e.g. Tue 27 Oct at 7:30am. She picks one or suggests other days.

Send these days to Helen

⏰ Install within 30 days of the safety check (by 21 Nov) or a new check is needed, and whoever's move it was pays for it.

QUOTE

Status Accepted 22 Oct

Your pay for this job **$2,890**

Your agreed rates × 137.6 m² measured at the Ready Check, incl. 40 m² removal. Paid within 7 days of our approval after the install.

Electrician — Home Insulation Victoria electrician
PIESA passed 22 Oct

READY CHECK

Visit — Done Mon 20 Oct at 7:30am

Mitti form — Complete · nothing missing

Open Mitti form ›

WHO'S DOING THIS

Ready Check — Deep Singh · done

Install day — Raj Kumar · CII cleared Change

The Mitti install form and the 6:30am text go to Raj. Only CII-cleared staff can do install days.

MESSAGES

Helen · Wed 22 Oct
Thanks, quote accepted. Mornings are best for us.

I've sent you 3 days | I'm on my way | Running 15 min late

Write a message ›

More · staff job links ›

My work | Add a job | Money | My business

Home Insulation Victoria INSTALLER Stage 9: The trade portal, every day

M6 · Screen: Money

When: What's owed and paid, per job.

Home Insulation Victoria DS

Money

Your pay, Reinsulate. Amounts include GST.

Coming
$5,130
Next Fri 31 Oct

Being checked
$2,890
1 job

This month
$6,840 paid
4 installs

Last month
$9,210 paid
5 installs

JOBS

HV-3098 · Clayton
Home Insulation Victoria lead · Install 27 Oct
$2,890
Being checked

HV-3102 · Wheelers Hill
Your customer · Install 22 Oct
$3,180
Coming Fri 31 Oct

HV-3074 · Mount Waverley
Home Insulation Victoria lead · Install 21 Oct
$1,950
Coming Tue 28 Oct

HV-3041 · Notting Hill
Your customer · Install 14 Oct
$2,420
Paid Thu 23 Oct

HV-3022 · Oakleigh
Home Insulation Victoria lead · Install 8 Oct
$1,760
Paid Fri 17 Oct

All paid jobs ›

HOW PAY WORKS

Your customers	Paid when the owner pays their balance
Our leads	Paid within 7 days of our approval

Ready Check visits are free, so they never appear here.
Nothing to invoice us.

PAID TO

Reinsulate Pty Ltd
BSB 063-xxx · account ending 4471

Change

Download statement

Home Insulation Victoria INSTALLER Stage 9: The trade portal, every day

M6 · Screen: Money, all paid

When: Nothing outstanding.

Home Insulation Victoria DS

‹ Money

All paid jobs

Everything paid to Reinsulate. Amounts include GST.

All | October | September

OCTOBER · $6,840

HV-3041 · Notting Hill
Your customer · Install 14 Oct
$2,420
Paid Thu 23 Oct

HV-3022 · Oakleigh
Home Insulation Victoria lead · Install 8 Oct
$1,760
Paid Fri 17 Oct

HV-3009 · Springvale
Home Insulation Victoria lead · Install 2 Oct
$1,540
Paid Fri 10 Oct

HV-2994 · Mulgrave
Your customer · Install 29 Sep
$1,120
Paid Mon 6 Oct

SEPTEMBER · $9,210

HV-2981 · Clayton
Home Insulation Victoria lead · Install 24 Sep
$2,310
Paid Fri 3 Oct

HV-2970 · Rowville
Your customer · Install 19 Sep
$2,860
Paid Mon 29 Sep

HV-2955 · Wantirna
Home Insulation Victoria lead · Install 15 Sep
$1,980
Paid Mon 22 Sep

Showing 3 of 5 September jobs.

Download statement

My work | Add a job | **Money** | My business

Home Insulation Victoria INSTALLER Stage 9: The trade portal, every day

M6 · Screen: Money, job detail

When: One job's money.

Home Insulation Victoria DS

‹ Money

HV-3102 · Wheelers Hill

Your customer · Install Wed 22 Oct

YOUR PAY

$3,180

Coming Fri 31 Oct

Inc GST · paid to the account ending 4471

WORK

Installed	Bradford Gold R5.0 · 148 m²
Removed	None
Crew	Deep Singh, Raj Kumar

TIMELINE

Install done	Wed 22 Oct
Rebate form signed	Wed 22 Oct · you and the owner
Office approved	Fri 24 Oct
Owner paid the balance	Fri 24 Oct
Pay due	Fri 31 Oct · 7 days after both

Your customers are paid once the office approves the paperwork and the owner has paid their balance.

Open the job ›

My work | Add a job | **Money** | My business

Home Insulation Victoria

ELECTRICIAN Stage 9: The trade portal, every day

E2 · Screen: My work (electrician)

When: Home screen: offers, Needs me, booked visits, every job's status line.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.index.tsx (electrician view). Names and figures are examples.

Hello Sam

2 jobs booked this week.

Offers
1
Pre Insulation Electrical Safety Assessment (PIESA)

Needs me
1
Your next actions

Moving automatically
3
No action needed now

Coming up
2
Booked visits

1 NEW JOB OFFER — Closes in 21h 10m

Pre Insulation Electrical Safety Assessment (PIESA) in Glen Waverley

View offer

Your move 1

Do the electrical fixes and sign them off
Priya Nair, Ringwood

Coming up

THU 29
9:00am

Pre Insulation Electrical Safety Assessment (PIESA) · Yang
18 Bogong Avenue, Glen Waverley ›

Your jobs 4

All | Moving automatically (3) | Needs chasing

HV-3117 · Helen Yang
Home Insulation Victoria lead
18 Bogong Avenue, Glen Waverley
PIESA booked · Thu 29 Oct 9:00–11:00am · You

HV-3102 · Priya Nair
4 Loughnan Road, Ringwood
Owner approved the fixes · sent Mon 20 Oct · 2 days · You

THIS MONTH
5 jobs done

$1,000

ELECTRICIAN Stage 9: The trade portal, every day

E10 · Screen: Money (electrician)

When: Any time: own visit rates only; owner-direct work listed, never paid by us.

Home Insulation Victoria

SL

From the live screen · drawn from src/routes/_authenticated/field.money.tsx (kind electrician). Names and figures are examples.

Money

Your pay, Spark Electrical. Amounts include GST.

Coming
$200
Next Wed 5 Nov

Being checked
$620
1 job

This month
$1,000 paid
5 installs

Last month
$800 paid
4 installs

JOBS

HV-3102 · Ringwood — $620
Electrical fixes · Tue 4 Nov — Being checked

HV-3117 · Glen Waverley — $200
PIESA · Wed 29 Oct — Coming Wed 5 Nov

HV-3088 · Mitcham — $200
PIESA · Mon 20 Oct — Paid Mon 27 Oct

All paid jobs ›

INVOICE THE OWNER DIRECTLY

The installer's customer chose you as their own electrician. You invoice and collect payment from the owner at your agreed price — Home Insulation Victoria doesn't pay this work and hasn't recorded the owner's payment.

HV-3120 · Boronia
PIESA — Owner payment: not recorded

HOW PAY WORKS

Your visits — Paid within 7 days of our approval

PAID TO

Spark Electrical Pty Ltd
BSB 063-xxx · account •••• 4821

Change

Download statement

My work | Money | My business

The office, every day

OFFICE

One queue of what needs a person (Needs me), then Enquiries, Jobs, Partners, Money and More. Nothing is sent by hand except held quotes.

WHAT HAPPENS

- Needs me (O1), Job page (O2), Jobs (O3), Partners (O5), Business file (O5b), Money (O6), Communications (O7), Settings (O7 settings).

OFFICIAL FORMS AND RECORDS AT THIS STAGE

- Switches: every message type is switched on one at a time; Test Centre for practice jobs.

EVERY TOUCH POINT AT THIS STAGE (THE PAGES THAT FOLLOW)

FOR	CODE	WHAT IT IS	WHEN
OFFICE	**ON1**	Screen: Needs me	The one office queue, most urgent first.
OFFICE	**ON2**	Screen: Job page	One page per job: stage, next action, money, forms, history.
OFFICE	**ON3**	Screen: Jobs	Six stages from Choose installer to Complete.
OFFICE	**ON5**	Screen: Partners	Installers and electricians.
OFFICE	**ON5b**	Screen: Business file	One partner business: people, rates, documents.
OFFICE	**ON6**	Screen: Money	Invoices, margins, what's owed; never records payments.
OFFICE	**ON7c**	Screen: Communications	Every email and text, with Outlook matching.
OFFICE	**ON7s**	Screen: Settings	Switches, Mitti forms, prices.

Home Insulation Victoria **OFFICE** Stage 10: The office, every day

ON1 · Screen: Needs me

When: The one office queue, most urgent first.

Home Insulation Victoria | **Needs me** | Enquiries | Jobs | Partners | Money | More ▾ | Find a job, owner or address | CM

Needs me

Saturday 24 October 2026 · 14 need you. Most urgent first.

Include TEST jobs

TODAY · 7

HV-3160	Papadopoulos	Croydon	Installer offer lapsed · no reply in 24h	1d	Choose again
HV-3141	Whitford	Mitcham	Quote held · electrician rate to confirm	3h	Check & send
HV-3096	Tanaka	Glen Iris	ESC consent · AP signature due 9:40am tomorrow	1h	Sign
HV-3088	Dimitriou	Nunawading	ESC notice window closes Tue 7:30am	8h	Open Registry block
HV-3082	O'Connell	Boronia	Deposit $612 not in Xero · hold ends in 9h	1d	Open job
HV-3044	Sutherland	Box Hill North	Final check · install complete · no flags	3d	Approve
HV-3150	Szabo	Oakleigh East	Send failed · text "Your installer has offered 3 days"	40m	Open job

THIS WEEK · 3

HV-3188	Okafor	Bentleigh East	Spot saved · waiting for an installer	2h	Choose installer
HV-3104	Brennan	Vermont South	Quote accepted · $349 paid · PIESA next	4h	Send offer
HV-3071	Moreau	Blackburn	VEEC Part A · four prerequisites recorded	2d	Sign

WATCH · 4

HV-3110	Haddad	Wantirna	$349 owner says paid · not in Xero	2d	Open job
HV-3057	Fernandes	Rowville	10 days left on the 30-day clock	today	Open job
HV-3049	Kowalski	Knoxfield	Couldn't get in · second time	3h	Open job
HV-3012	Abeysekera	Ferntree Gully	VEEC form unsigned · day 10	today	Open job

4 partner & system items ›

Home Insulation Victoria **OFFICE** Stage 10: The office, every day

ON2 · Screen: Job page

When: One page per job: stage, next action, money, forms, history.

Home Insulation Victoria | Needs me | Enquiries | **Jobs** | Partners | Money | More ▾ | Find a job, owner or address | CM

‹ Jobs **HV-3104** Our lead Quote accepted · $349 paid

More ▾

Siobhan Brennan

27 Hanover Road · Vermont South · 3133

0412 555 018 Call Text s.brennan@example.com Email

Website enquiry 9 Oct · permission to contact given 9 Oct · Last heard from us: Fri 24 Oct 10:12am · email

NEXT · US

Choose the electrician for the PIESA — Volt Right Electrical is Reinsulate's usual electrician.

Send offer

1 · ENQUIRY — Done

Received	Thu 9 Oct 2:04pm · website Save my spot
Estimate	$5,120 after the VEEC incentive · link opened 9 Oct
Owner said	No insulation · about 130 m² · owner-occupied
Eligibility	6 of 6 checks pass · confirmed onsite 18 Oct
Photos	4 roof-space photos

2 · READY CHECK — Done

Installer	Reinsulate · chosen 10 Oct · accepted 10 Oct
Visit	Sat 18 Oct 8:00am · owner confirmed
Mitti form	Complete 18 Oct 9:35am · synced
Measured	142 m² · 2 areas · no existing insulation
Product	Earthwool Ceiling Batt R5.0 · area diagram filed

Open Mitti form ›

3 · QUOTE — Accepted

Sent	Sun 19 Oct 11:05am · all checks passed
Amount	$5,480 inc GST · VEEC incentive −$1,620 · owner pays $3,860
Accepted	Thu 23 Oct 4:35pm · agreement signed by Siobhan Brennan
$349	Paid Fri 24 Oct 9:50am · card

Open quote ›

4 · PIESA — Next

Electrician	Usual electrician Volt Right Electrical · approved REC · pre-marked

5 · INSTALL — Not yet

Clock	30 days start at the PIESA
Deposit	$351 (10%) to book · bank transfer

6 · FINAL CHECK — Not yet

Install	—
Evidence	—

Offer	Not sent yet
Visit	Agreed between electrician and owner after the offer
Hazards	—
Fixes	—

Install days	Installer offers 3 days after the PIESA
ESC consent	Signed when the install day is booked
ESC notice	Robot submits in the 24h–5 day window

VEEC form	Installer → AP → owner, after the install
Ready for VEEC	—

MONEY · INVOICE INV-3104 · $3,860 INC GST · PAID $349

Xero invoice (office view)

$349 safety check	At acceptance · card	Paid 24 Oct · Stripe
Electrical fixes	In full at approval · bank transfer	None yet
Deposit $351 (10%)	To book the install · bank transfer · held 48h	Not due · Xero
Balance $3,160	On install day · bank transfer	Not due · Xero

Our margin $1,274 (23%) Breakdown ▾

Owner price before rebate	$5,480
GST	-$498
Installer pay · 142 m² × $24.50	-$3,479
Electrician PIESA	-$280
Fixes cost (fixes +$100 stays ours)	-$0
VEEC value received	+$1,671
VEEC incentive given	-$1,620
Margin · office only	**$1,274**

Synced with Xero 24 Oct 9:51am · bank transfer to Home Insulation Victoria, NAB BSB 082-902 acct 777966349, reference INV-3104

Payments arrive from Stripe (the $349) or Xero reconciliation · nothing is recorded by hand

CONTACT HISTORY · 11

Log a call or note

Waiting for: us — choose the electrician and send the PIESA offer.

All | Email | Text | Phone | Portal | Outlook | Website

Fri 24 Oct 10:12am	↑ Sent	Email	Thanks — your $349 payment is received	Delivered
Fri 24 Oct 9:50am	↓ Received	Portal	Owner paid $349 by card	Recorded
Thu 23 Oct 4:36pm	↑ Sent	Text	Thanks Siobhan, your quote is accepted. Next: the electrician's safety check…	Delivered

Thu 23 Oct 4:35pm	↓ Received	Portal	Owner accepted the quote and signed the agreement	Recorded
Tue 21 Oct 2:10pm	↓ Received	Outlook	Re: Your quote for 27 Hanover Road — can the electrician come on a Monday?	Replied 21 Oct
Sun 19 Oct 11:05am	↑ Sent	Email	Your quote for 27 Hanover Road, Vermont South	Opened
Sat 18 Oct 6:30am	↑ Sent	Text	Good morning! Reinsulate arrives at 8:00am today.	Delivered
Fri 10 Oct 3:20pm	↑ Sent	Email	Your Ready Check is booked for Sat 18 Oct 8:00am	Opened
Thu 9 Oct 2:40pm	☎ Call	Phone	Chris called: confirmed access via side gate, no pets	Logged
Thu 9 Oct 2:05pm	↑ Sent	Email	Your estimate for 27 Hanover Road	Opened
Thu 9 Oct 2:04pm	↓ Received	Website	Save my spot enquiry	Recorded

FILE · 5 DOCUMENTS · RETAIN UNTIL OCT 2032 — Export pack

Area diagram · Ready Check	PDF	18 Oct
Ready Check form (Mitti)	PDF	18 Oct
Quote HV-3104	PDF	19 Oct
Acceptance agreement	Signed	23 Oct
Tax invoice INV-3104	Xero	23 Oct
PIESA report	—	After the electrician's visit
ESC owner consent	—	When the install day is booked
PIISA · SWMS · install day form	—	Install day
Final area diagram	—	After the install
VEEC assignment form	—	After the install

Home Insulation Victoria **OFFICE** Stage 10: The office, every day

ON3 · Screen: Jobs

When: Six stages from Choose installer to Complete.

Home Insulation Victoria | Needs me | Enquiries | **Jobs** | Partners | Money | More ▾ | Find a job, owner or address | CM

Jobs

45 active · from Choose installer to Final check · every job in one stage.

Active · 45 | Closed · 1,312

New from installers · 3 › | Ready Checks started in Mitti · 2 › | Mitti sync problems · 1 ›

All 45 | Choose installer 6 | Ready Check 11 | Quote 8 | PIESA 6 | Install 10 | Final check 4 | Installers' own jobs 14

INSTALLER: Reinsulate | Eastside Insulation | Southern Ceilings | Peninsula Ceilings | None yet

SUBURB / AREA: Eastern suburbs | South-east | North | West | Any suburb...

INSULATION: No | Some | Not sure

LAST HEARD: Today | This week | Older | Never

SOURCE: Website | Phone | Installer

Pick as many as you like · every column is sortable.

45 of 45 match | Sort: last heard from us ▾ | Actions ▾

	JOB	OWNER	SUBURB	STAGE	STATUS	LAST HEARD FROM US	INSTALLER
☐	HV-3188	Okafor	Bentleigh East	Choose installer	Spot saved · waiting for an installer	Today 8:10am · email	Choose installer
☐	HV-3172	Lindqvist	Ringwood	Choose installer	Installer offer lapsed · choose again	Yesterday · text	Choose installer
☐	HV-3151	Dawson	Wheelers Hill	Ready Check	Installer entering the Ready Check day	22 Oct · email	Reinsulate (own)
☐	HV-3133	Vuong	Clayton South	Ready Check	Ready Check Mon 27 Oct 7:30am	Today 6:30am · text	Reinsulate

☐	HV-3141	Whitford	Mitcham	Quote	Quote held · electrician rate to confirm	23 Oct · email	Eastside Insulation
☐	HV-3127	Nair	Doncaster East	Quote	Quote sent 22 Oct · owner has it	22 Oct · email	Reinsulate
☐	HV-3104	Brennan	Vermont South	PIESA	Quote accepted · choose electrician	Today 10:12am · email	Reinsulate
☐	HV-3098	Marsh	Clayton	PIESA	PIESA Tue 28 Oct 9:00am · Volt Right	21 Oct · text	Reinsulate
☐	HV-3088	Dimitriou	Nunawading	Install	Install Wed 28 Oct 7:30am · booked	Today 6:30am · text	Eastside Insulation
☐	HV-3082	O'Connell	Boronia	Install	Install day held · deposit not received	Yesterday · email	Reinsulate
☐	HV-3057	Fernandes	Rowville	Install	Installer offered 3 days · owner picking	20 Oct · text	Peninsula Ceilings
☐	HV-3044	Sutherland	Box Hill North	Final check	Install complete 21 Oct · final check	21 Oct · email	Reinsulate
☐	HV-3012	Abeysekera	Ferntree Gully	Final check	Ready for VEEC · owner to sign	Today 7:00am · text	Eastside (own)

Showing 13 of 45 · next page ›

OFFICE Stage 10: The office, every day

ON5 · Screen: Partners

When: Installers and electricians.

Home Insulation Victoria | Needs me | Enquiries | Jobs | Partners | Money | More ▾ | Find a job, owner or address | CM

Partners

Who we work with.

Find a business or person

Applications 3 | Approved 4 | People 6 | Rates 5 | Coverage 4

4 businesses · 3 installers, 1 electrician

BUSINESS	AREA	CII CLEARED	PL INSURANCE	USUAL ELECTRICIAN	TAKING NEW JOBS
Reinsulate	Eastern suburbs	4 of 5	to 14 Mar 2027	Volt Right Electrical	On
Eastside Insulation	Outer east	3 of 3	to 30 Nov 2026	HIV electrician	On
Southern Ceilings	South-east	2 of 2	to 2 Aug 2027	Volt Right Electrical	Paused by them
Volt Right Electrical	East · REC	2 of 2	to 10 Jan 2027	—	On

Home Insulation Victoria **OFFICE** Stage 10: The office, every day

ON5b · Screen: Business file

When: One partner business: people, rates, documents.

Home Insulation Victoria | Needs me | Enquiries | Jobs | **Partners** | Money | More ▾ | Find a job, owner or address | CM

‹ Partners · Approved | Installer | Taking new jobs · On

More ▾

Reinsulate

Reinsulate Pty Ltd · Eastern suburbs · approved since 2 Jun 2026

Deep Singh, owner · 0401 555 230 **Call** **Text** deep@reinsulate.example **Email**

AGREEMENT

View PDF

Version	Installer agreement v1.16 · schedule of rates attached
Signed	Deep Singh (owner) · Thu 2 Oct 2026 4:12pm
Countersigned	Jo Mitchell for Home Insulation Victoria · 2 Oct 2026
Earlier	v1.14 signed 11 Jun 2026 · kept in Documents
ESC notice	Scheme-participant collection notice acknowledged 2 Oct 2026

RATES

Ceiling batts R5.0 · $24.50/m²	from 1 Oct 2026
Ceiling batts R4.0 · $21.00/m²	from 1 Oct 2026
Minimum job · $900	from 1 Oct 2026
Top-up over existing · $19.00/m²	from 1 Oct 2026

Change request R5.0 → $25.50/m² from 1 Nov asked 22 Oct **Approve**

Rate history · 3 earlier cards ›

INSURANCE & LICENCES

Upload a new certificate ›

Public liability	$20m · Allianz · to 14 Mar 2027 · certificate on file
Workers comp	WorkSafe Victoria · to 30 Jun 2027 · certificate on file
ABN	41 118 220 377 · Reinsulate Pty Ltd
Licences	No electrical work · usual electrician holds the REC
Next check	PL insurance renewal reminder 14 Feb 2027

PEOPLE · 5

Deep Singh · owner, lea…	Level 2 to Feb 2028 · notice ✓ · Mitti ✓	Open
Marcus Bell · installer	CII to verify · notice ✓ · Mitti ✓	Verify CII
Sunil Verma · installer	Level 2 to Sep 2027 · notice ✓ · Mitti ✓	Open
Ravi Kapoor · installer	Level 1 to Apr 2027 · notice ✓ · Mitti ✓	Open

Jake Morrow · i... Level 2 to Nov 2027 · notice ✓ · Mitti — Invite to Mitti

USUAL ELECTRICIAN

Open Volt Right Electrical ›

Business	Volt Right Electrical · approved REC
REC	24110 · Ana Costa, licensed electrician
PIESA rate	$280 agreed · fixes by item (owner pays fixes + $100)
Used on	7 of 9 jobs this month

BANK DETAILS

Show full details (logged) ›

Account name	Reinsulate Pty Ltd
BSB · account	083-••• · ••••6214
Changed	11 Jun 2026 by Deep Singh · confirmed by phone
Xero supplier	Linked · Reinsulate Pty Ltd

JOBS

Open Jobs filtered to Reinsulate ›

This month	9 jobs · 4 installs done · $6,840 paid out
All time	63 jobs · 58 complete · 2 cancelled · 3 active
Own jobs	14 active installer's own jobs

COVERAGE

Edit

Areas	Eastern suburbs
Suburbs	Glen Waverley, Mulgrave, Wheelers Hill, Mount Waverley, Clayton, Oakleigh, Notting Hill, Burwood + 15 more
Postcodes	3145–3170
Radius	Up to 25 km from Mulgrave

DOCUMENTS · 9

Upload a document ›

Installer agreement v1.16 · signed	2 Oct 2026 · PDF	View
Schedule of rates · 1 Oct 2026	2 Oct 2026 · PDF	View
Public liability certificate · Allianz	14 Mar 2026 · PDF	View
Workers comp certificate · WorkSafe	1 Jul 2026 · PDF	View
ESC collection notice acknowledgement	2 Oct 2026 · PDF	View
Installer agreement v1.14 · signed	11 Jun 2026 · PDF	View

CII certificates · 4 people	latest 20 Oct 2026 · PDF	View
Privacy notice acknowledgements · 5 people	latest 3 Oct 2026 · PDF	View
Application form · Reinsulate	28 May 2026 · PDF	View

Home Insulation Victoria OFFICE Stage 10: The office, every day

ON6 · Screen: Money

When: Invoices, margins, what's owed; never records payments.

Home Insulation Victoria | Needs me | Enquiries | Jobs | Partners | Money | More ▾ | Find a job, owner or address | CM

Money

What we earn and owe.

Find an invoice, job or business

Overview Oct | Payouts 4 | Invoices 9 | VEECs 14 | Prices 6

October 2026 · what we earn and owe · office only

VEECS LODGED · OCTOBER	OWNERS OWE	WE OWE TRADES	MARGIN · OCTOBER
14 jobs · 262	$18,420	$12,310	$14,905
$24,209 at the price on the day	9 invoices · 2 overdue	payouts due Friday	14 jobs complete · 24% average

JOB	OWNER	PRICE	INSTALLER PAY	ELECTRICIAN	VEEC NET	MARGIN	%	
HV-3041	Petrov	$5,980	−$3,650	−$280	+$120	$1,626	27%	Complete 16 Oct
HV-3022	Huang	$4,420	−$2,780	−$280	+$80	$1,038	23%	Complete 9 Oct
HV-3009	Rossi	$6,240	−$3,910	−$280	+$95	$1,578	25%	Complete 8 Oct
HV-3104	Brennan	$5,480	−$3,479	−$280	+$51	$1,274	23%	Quote accepted
HV-3088	Dimitriou	$5,120	−$3,240	−$280	+$70	$1,205	24%	Install Wed 28 Oct
HV-3082	O'Connell	$6,890	−$4,310	−$280	+$110	$1,784	26%	Install held

Price is before the VEEC incentive and includes GST; VEEC net = value received − incentive given; margin after GST, installer, electrician and fixes cost. Office only — never shown to trades or owners.

OFFICE Stage 10: The office, every day

ON7c · Screen: Communications

When: Every email and text, with Outlook matching.

Home Insulation Victoria | Needs me | Enquiries | Jobs | Partners | Money | More ▾ | Find a job, owner or address | CM

‹ More

Communications

What went out, what failed, what is held.

Held & queued 219 | Sent 48 | Failed 3 | Outlook 5

212 held · 7 queued · click a message to see who it is for

MESSAGE	WAITING	WHY	
▸ Quote accepted · email	38	customer emails off	Cancel these
▸ Quote accepted · text	36	customer texts off	Cancel these
▸ Your quote is ready · email	18	customer emails off	Cancel these
▸ Save my spot reminder · email	54	customer emails off	Cancel these
▸ Spot saved — we'll find your installer · text	22	spot saved texts off	Cancel these
▸ Your installer has offered 3 days · text	20	customer texts off	Cancel these
▸ Please sign the rebate form — reminder · email	11	VEEC reminders off	Cancel these

▸ Please sign the rebate form — reminder · text	11	VEEC reminders off	Cancel these
▸ We couldn't get in today · text	2	no-access texts off	Cancel these

QUEUED · SENDS AT THE NEXT RUN

▸ Good morning — today's Mitti links · text to installers	4	sends tomorrow 6:30am	Cancel these
▸ Please sign the rebate form · text to installers	3	sends tomorrow 7:00am	Cancel these

Customer emails and texts are off until Jo switches each type on under Settings › Switches. Held messages never send on their own.

Cancel all held · 212

OFFICE Stage 10: The office, every day

ON7s · Screen: Settings

When: Switches, Mitti forms, prices.

Home Insulation Victoria | Needs me | Enquiries | Jobs | Partners | Money | More ▾ | Find a job, owner or address | CM

‹ More

Settings

Wording, forms, connections and switches.

Templates | Switches | Automatic rules | Mitti forms | ESC fields | Xero | Users & access | Deleted | Test Centre

Every email and text, who gets it and when

MESSAGE	WHO · WHEN	HOW IT GOES	
Your estimate · email	Owner · on enquiry	Automatic	Approved
Save my spot reminder · email	Owner · days 2, 7, 21	Automatic	Approved
Quote accepted · email + text	Owner · on acceptance	Automatic	Approved
All done — please sign the rebate form · email + text	Owner · install complete	Automatic	Approved
Please sign the rebate form — reminder · email + text	Owner · days 1, 3, 7	Automatic	Approved
Your signed rebate form (copy) · email	Owner · within 10 business days	Automatic	Approved
Your signed ESC consent (copy) · email	Owner · after the AP signs	Automatic	Approved

We couldn’t get in today · email + text	Owner · install no access	Automatic	Approved
Welcome aboard — you’re approved · email	Installer · on approval	Pressed · Partners	Approved
Good morning — today’s Mitti links · text	Installer · 6:30am job days	Automatic	Approved
Thanks for letting us know · email	Owner · quote declined	Automatic	Draft · for Jo

Click a message to read it. The ESC consent form, VEEC assignment form and Activity Guide versions are listed at the end of the register.